




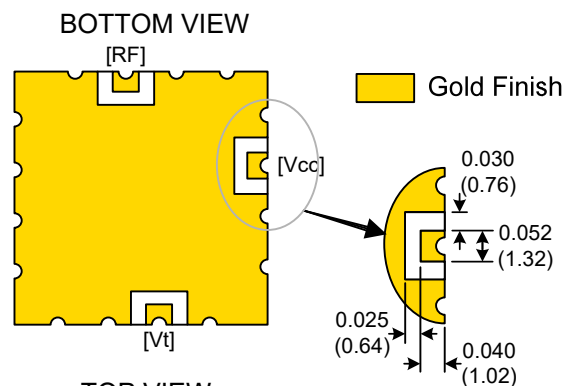

PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			787	MHz
Upper Frequency:	816			MHz
Tuning Voltage:	0		9.0	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+6.0	+8.0	+10.0	dBm
Supply Current:		25	35	mA
Harmonic Suppression: (2 <sup>nd</sup> Harmonic)		-20	-15	dBc
Pushing:		0.2	0.4	MHz/V
Pulling, all Phases:		0.5	1.0	MHz pk-pk
Tuning Sensitivity:		5		MHz/V
Phase Noise @ 10kHz offset:		-123	-120	dBc/Hz
Phase Noise @ 100kHz offset:		-143	-140	dBc/Hz
Load Impedance:		50		$\Omega$
Input Capacitance:		47		pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

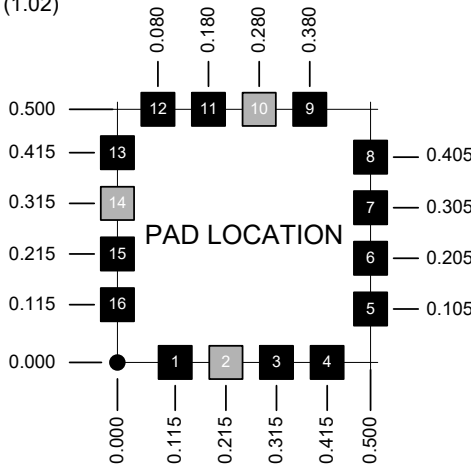

Pad	Connection
2	Vt
10	RF-OUTPUT
14	Vcc
Others	GROUND

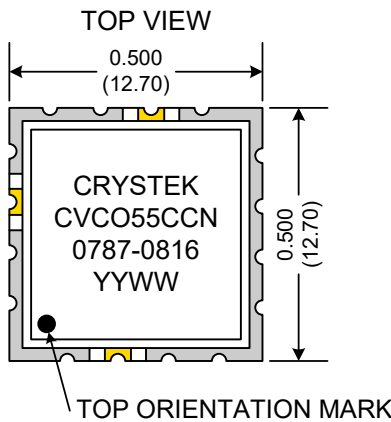

- Unless otherwise specified, Dimensions are in:  $\frac{\text{IN}}{\text{mm}}$
- Pad Location Dimensions are in: Inches



Product Control:			
Crystek Part Number:	CVCO55CCN-0787-0816	Release Date:	04-Apr-2019
Revision Level:	A	Responsible:	C. Vales