




RECOMMENDED 9x14mm OSCILLATOR REFLOW SOLDERING PROFILE

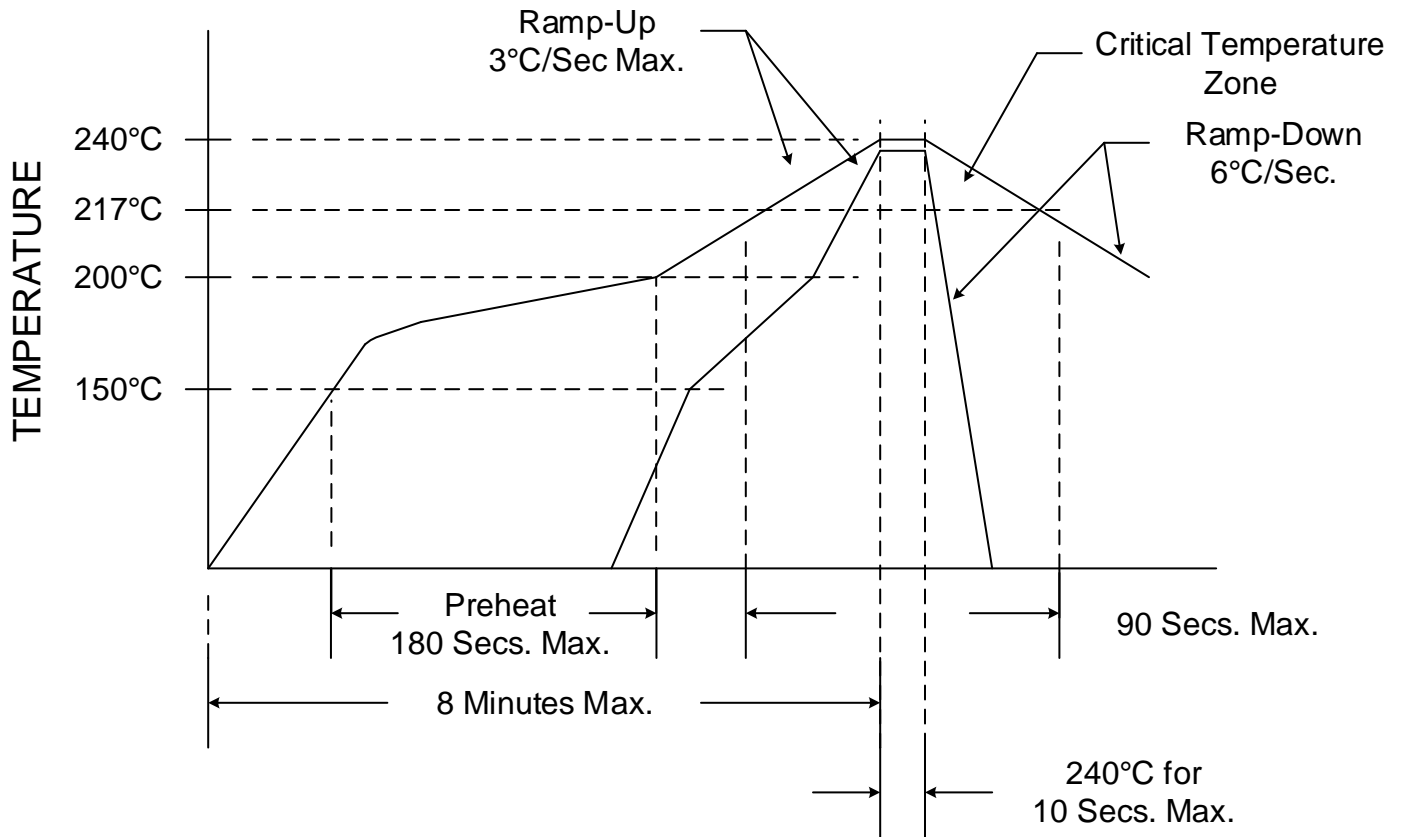

All temperatures refer to the topside of the package, measured on the package body surface. SMD oscillators must be on the top side of the PCB during the reflow process.

Process Control:

Crystek Drawing No.:	900034	Release Date:	29-Jun-2016
Revision Level:	B	Responsible:	K. Piotrowicz

