


# Ultra-Low Noise LVPECL VCXO

## with -160 dBc/Hz Noise Floor!

### CVPD-925 Model


9x14 mm SMD, 3.3V, LVPECL

<b>Frequency Range:</b>	131 MHz to 160 MHz
<b>Frequency Pulling:</b>	±20ppm APR Min
<b>Temperature Range:</b>	0°C to 70°C
(Option X)	-40°C to 85°C
<b>Storage:</b>	-45°C to 90°C
<b>Input Voltage:</b>	3.3V ±0.3V
<b>Input Current:</b>	88mA Max
<b>Output:</b>	Differential LVPECL
Symmetry:	45/55% Max @ zero crossing point
Rise/Fall Time:	1ns Max (20% to 80%)
Linearity:	±10% Max
Logic:	Terminated to Vcc-2V into 50 ohms
	"0" = Vcc-1.85V Min, Vcc-1.62V Max
	"1" = Vcc-1.02V Min, Vcc-0.81V Max
Disable Time:	200ns
Start-up Time:	1ms Typical, 2ms Max
<b>Input:</b>	
Modulation Bandwidth:	>10kHz @ -3dB
Input Impedance:	51 kΩ
Control Voltage:	1.65V ±1.65V
Tuning Sensitivity:	+25ppm/V Typical
<b>Sub-Harmonics:</b>	None
<b>Phase Jitter:</b>	12 kHz to 20 MHz 58 femtoseconds Typical @ 160 MHz
<b>Phase Noise:</b>	See Plot
<b>Aging:</b>	<3ppm 1 <sup>st</sup> year, <1ppm every year thereafter



Available Frequencies (MHz):

155.520  
156.250  
160.000

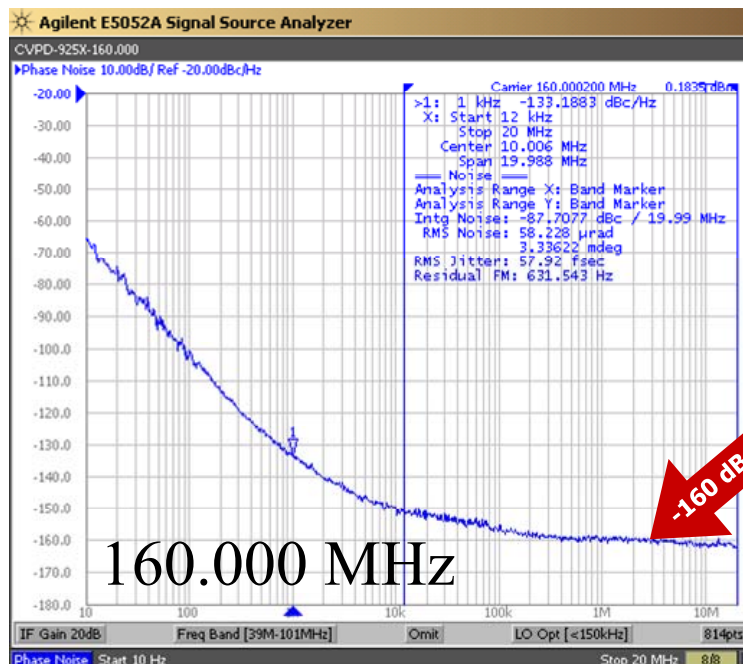

Rev: B  
Date: 19-Nov-2018  
Page 1 of 2

Specifications subject to change without notice.

# Ultra-Low Noise LVPECL VCXO

## with -160 dBc/Hz Noise Floor!

**CVPD-925 Model**  
9x14 mm SMD, 3.3V, LVPECL



### Crystek Part Number Guide

CVPD-925 X - 160.000


#1 #2 #3 #4

#1 Crystek 9x14 SMD PECL VCXO  
#2 Model 925  
#3 Temp. Range: Blank = 0/70°C, X = -40/85°C  
#4 Frequency in MHz: 3 or 6 decimal places

Example:  
CVPD-925X-160.000 = 3.3V, 45/55, -40/85°C, 160.000 MHz

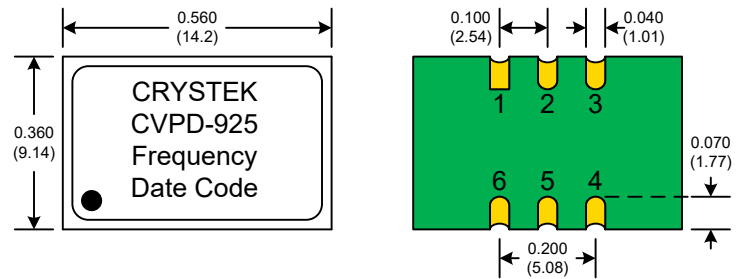

### SUGGESTED PAD LAYOUT



**PAD FINISH:** Immersion Gold (ENIG); 5 micro inches maximum

### RECOMMENDED REFLOW SOLDERING PROFILE 900034 (See App Note listed on website)

<http://www.crystek.com/specification/reflow/900034.pdf>

PIN	Function
1	Control Volt
2	E/D
3	GND
4	OUT
5	COUT
6	Vdd

Enable/Disable	
Pin 2 Input	Output Pin
Open	Active
"1" level 2.0V Min	High Z
"0" level 0.8V Max	Active

### Mechanical:

Shock: MIL-STD-883, Method 2002, Condition B  
Solderability: MIL-STD-883, Method 2003  
Vibration: MIL-STD-883, Method 2007, Condition A  
Solvent Resistance: MIL-STD-202, Method 215  
Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J

### Environmental:

Thermal Shock: MIL-STD-883, Method 1011, Condition A  
Moisture Resistance: MIL-STD-883, Method 1004

### Packaging:

Tape/Reel: 100ea, 250ea, 500ea 24mm Tape

Rev: B

Date: 19-Nov-2018

Page 2 of 2