




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			120	MHz
Upper Frequency:	165			MHz
Tuning Voltage:	0.5		6.0	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+6.0	+8.0	+10.0	dBm
Supply Current:			25	mA
Harmonic Suppression (2 nd Harmonic)		-30	-20	dBc
Pushing:		0.8	1.5	MHz/V
Pulling, all Phases:		0.5	1.0	MHz pk-pk
Tuning Sensitivity:		11		MHz/V
Phase Noise @ 10kHz offset:		-105		dBc/Hz
Phase Noise @ 100kHz offset:		-125		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			330	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$


FRONT

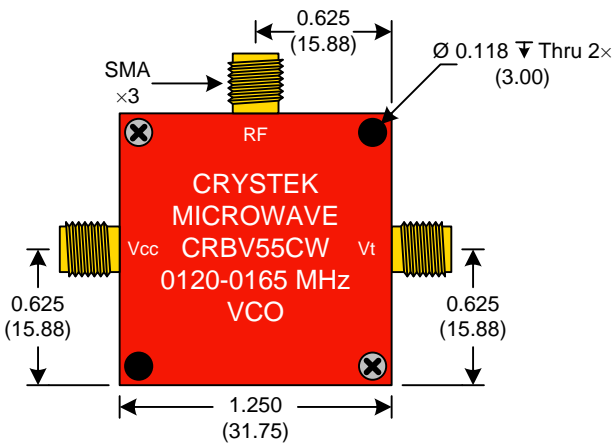

BACK



SIDE

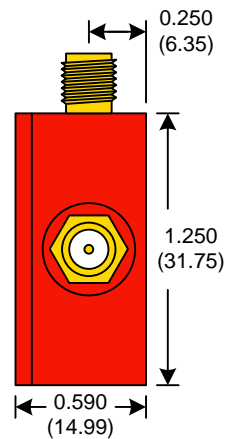

● Unless otherwise specified, Dimensions are in: $\frac{\text{IN}}{(\text{mm})}$


Product Control:

Crystek Part Number:	CRBV55CW-0120-0165	Release Date:	26-Jan-2016
Revision Level:	B	Responsible:	C. Vales






Phase Noise (1 Hz BW, Typical)

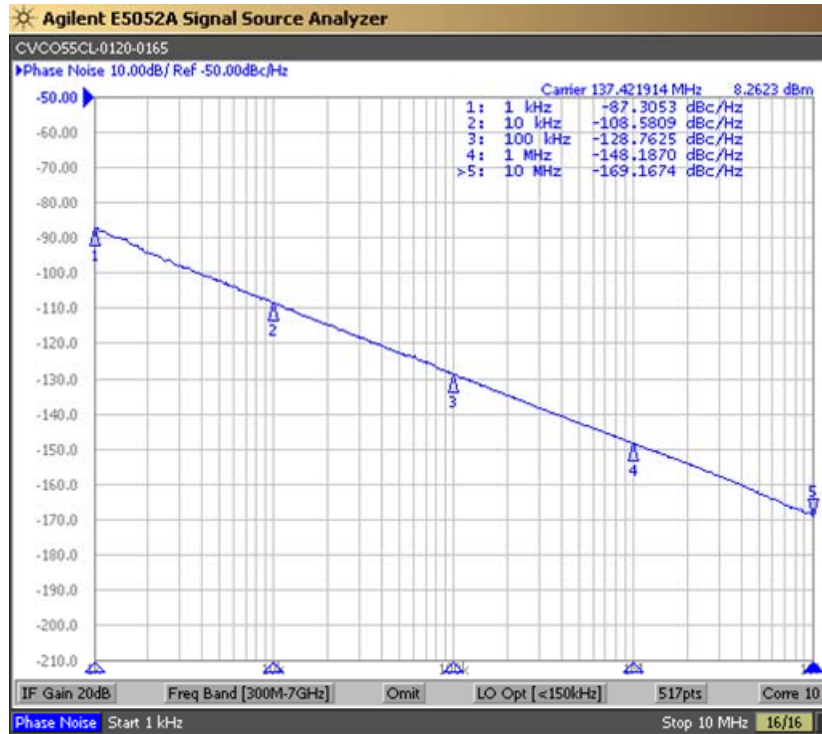

Tuning Curve (Typical)

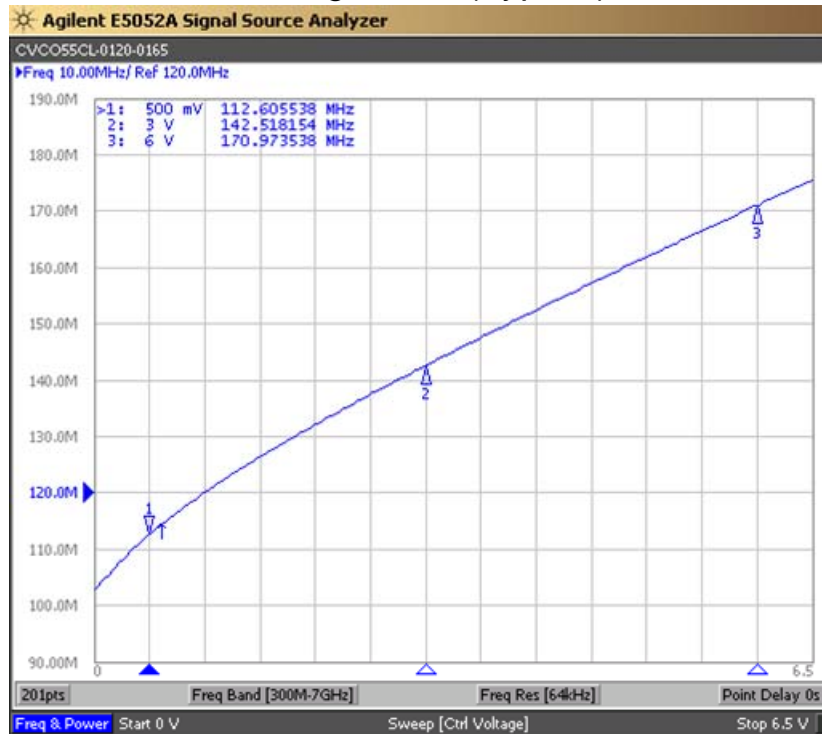

Product Control:

Crystek Part Number:	CRBV55CW-0120-0165	Release Date:	26-Jan-2016
Revision Level:	B	Responsible:	C. Vales

Specification is subject to change without notice

