



**CRYSTEK**  
**MICROWAVE**  
 A DIVISION OF CRYSTEK CORPORATION

**HIGH POWER, LOW LOSS  
 UT-390 SEMI-RIGID COAX  
 CABLE ASSEMBLY WITH  
 7/16 CONNECTORS**

**UT-390 High Power, Low Loss Semi-Rigid Coaxial Assemblies**



**Features:**

- Center Conductor:** SPC (Silver-Plated Solid Copper)
- Outer Conductor:** Semi-rigid copper
- Dielectric:** PTFE (Polytetrafluoroethylene)
- Cable Outer Diameter:** 0.390" (9.906mm)
- Connectors:** Silver-plated brass
- Center Pin:** Silver-plated phosphor bronze
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.75"
- Assembly Length:** 60" Max

**Electrical Specifications:**

- Impedance:** 50 Ohms
- Frequency (7/16 Conn.):** Up to 2.1 GHz
- Insertion Loss:** <0.05 dB/ft at 1 GHz
- VSWR:** <1.3 to 2.1 GHz
- Voltage Withstanding:** 12k VRMS @ 60 Hz
- Corona Extinction Volt.:** 6k VRMS @ 60 Hz
- Nominal Capacitance:** 29.0 pF/ft
- Velocity of Propagation:** 70%
- Attenuation (dB/ft):** 0.03 Max at 500 MHz
- \*connector loss not included* 0.05 Max at 1 GHz
- 0.13 Max at 5 GHz
- 0.20 Max at 10 GHz


Power Handling (Watts): 900 Max at 2.1 GHz  
 (Watts CW at 20 degrees Celsius and Sea level)

**Mechanical Specifications:**

**Connector Durability:**  
 500 connections Minimum

Electrical Test Data Supplied With Each Cable Assembly

*Customer Specified Length*

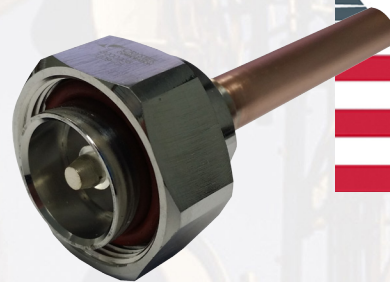

**7/16 / 7/16 [Straight/Straight]**

Part Number	Description	Length
CCUT-MM-390-XX	Low Loss UT-390 Coax Cable, 7/16 Male/Male, Straight/Straight	Inches



**CRYSTEK**  
 CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
 PHONE: 239-561-3311 • 800-237-3061 Rev.: A  
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-08-14




**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION


**HIGH POWER, LOW LOSS  
UT-390 SEMI-RIGID COAX  
CABLE ASSEMBLY WITH  
7/16 CONNECTORS**



**Actual Data Plot PN: CCUT-MM-390-19**

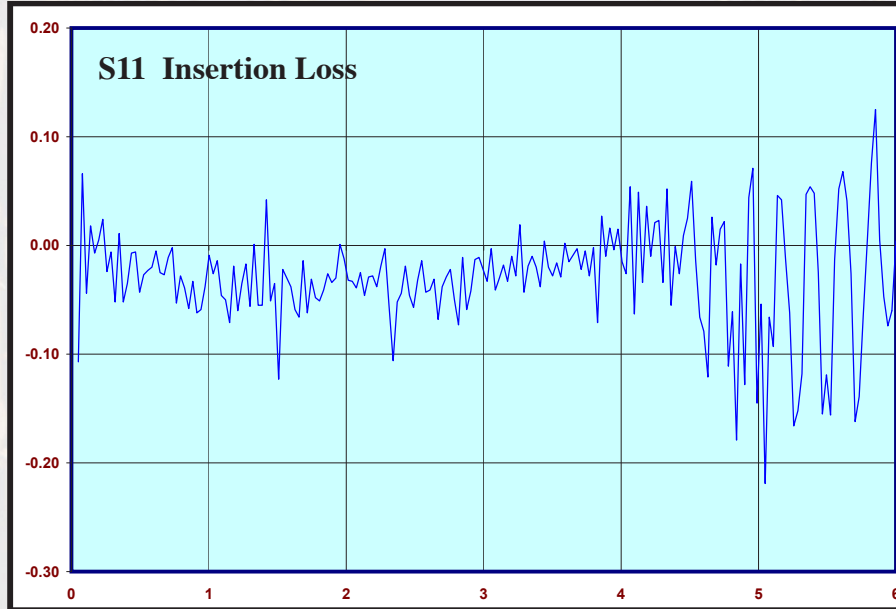

**Actual Data Plot PN: CCUT-MM-390-19**

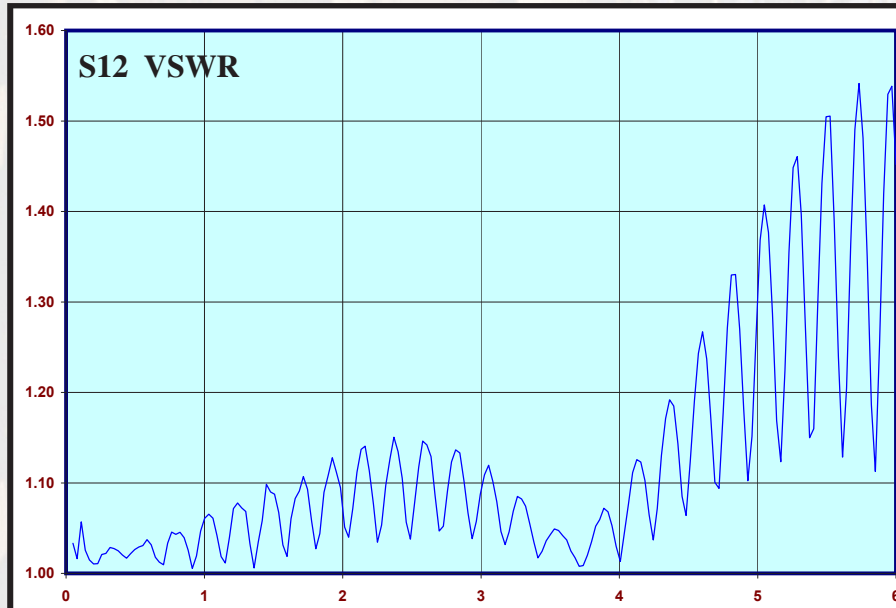

**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: A  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-08-14