

CCPD-024 5×7mm SMD LVPECL Clock Oscillator

CCPD-024 Model
5×7 mm SMD, 2.5V, LVPECL



Model CCPD-024 is a 162.000 MHz to 250.000 MHz LVPECL Clock Oscillator operating at 2.5 Volts. The oscillator utilizes a High Q crystal design providing very low Jitter and Phase Noise. No Sub-Harmonics are present in the Output Signal.



5×7mm SMD

Applications:

**Digital Video
SONET/SDH/DWDM
Storage Area Networks
Broadband Access
Ethernet, Gigabit Ethernet**

Rev: J
Date: 16-Sep-2021
Page 1 of 3


CCPD-024 5×7mm SMD LVPECL Clock Oscillator



CCPD-024 Model

5×7 mm SMD, 2.5V, LVPECL

Frequency Range:	162.000 MHz to 250.000 MHz
Frequency Stability Options(ppm):	±20, ±25, ±50, ±100
Temperature Range:	(standard) 0°C to +70°C
	-20°C to +70°C
	(Option M)
	-40°C to +85°C
	(Option X)
Storage:	-45°C to 90°C
Input Voltage:	2.5V ±0.125V
Input Current:	55mA Typical, 88mA Max
Output:	Differential LVPECL
Symmetry:	45/55% Max @ zero crossing point
Rise/Fall Time:	1nsec Max (20% to 80%)
Logic:	Terminated to Vdd-2V into 50 Ω
Temp. 0°C to 85°C	“0”=0.690 Min, 1.095 Max
	“1”=1.475 Min, 1.760 Max
Temp. -40°C to 0°C	“0”=0.670 Min, 1.195 Max
	“1”=1.415 Min, 1.620 Max
	200nSec Max
Disable Time:	1mSec Typical, 2mSec Max
Enable Time:	0.5psec Typical, 1psec RMS Max
Phase Jitter: 12kHz~80MHz	
Phase Noise: (See Plot Below)	
Sub-harmonics:	None
Aging:	<3ppm 1 st year, <1ppm every year thereafter

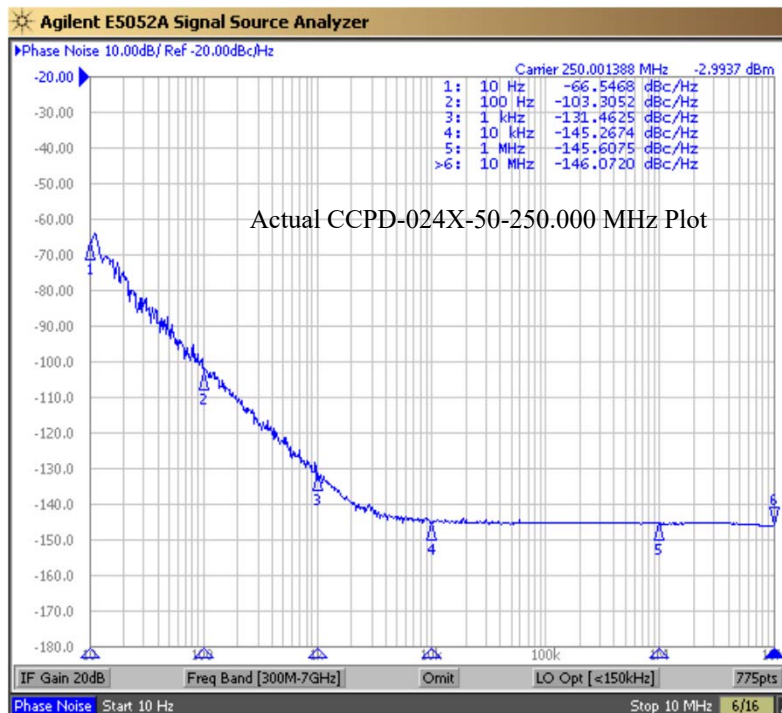



Rev: J
Date: 16-Sep-2021
Page 2 of 3

CCPD-024 Model
5×7 mm SMD, 2.5V, LVPECL




Crystek Part Number Guide																
CCPD - 024 X - 25 - 250.000																
#1	#2	#3	#4	#5												
#1 Crystek LVPECL Osc. #2 Model 024 #3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C #4 Stability: (see Table 1) #5 Frequency in MHz: 3 or 6 decimal places																
Example: CCPD-024X-25-250.000 2.5V, -40/85°C, ±25ppm, 250.000 MHz																
			<table border="1"> <thead> <tr> <th colspan="2">Stability Indicator</th> </tr> </thead> <tbody> <tr> <td>Blank</td> <td>± 100ppm</td> </tr> <tr> <td>50</td> <td>± 50ppm</td> </tr> <tr> <td>25</td> <td>± 25ppm</td> </tr> <tr> <td>20*</td> <td>± 20ppm</td> </tr> <tr> <td colspan="2">*not available in -40/85</td> </tr> </tbody> </table>		Stability Indicator		Blank	± 100ppm	50	± 50ppm	25	± 25ppm	20*	± 20ppm	*not available in -40/85	
Stability Indicator																
Blank	± 100ppm															
50	± 50ppm															
25	± 25ppm															
20*	± 20ppm															
*not available in -40/85																
Table 1																



Mechanical:	
Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition I or J
Environmental:	
Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004

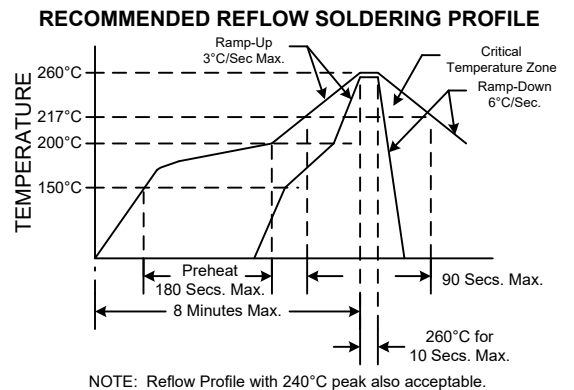

Dimensions inches (mm)
All dimensions are Max unless otherwise specified.



Enable/Disable Function	
Function pin 1	Output pin
Open or N/C	Active
"1" level 0.7×V _{DD} Min	Active
"0" level 0.3×V _{DD} Max	High Z

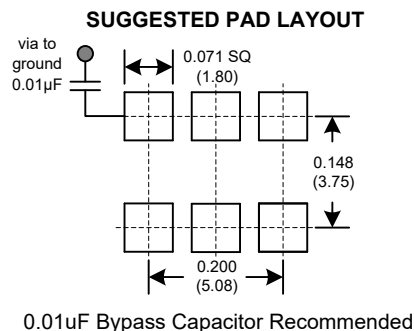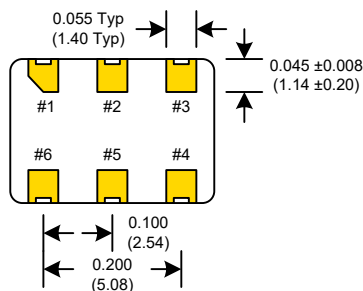

PIN	Connection
1	Enable/Disable
2	N/C
3	GND
4	Output
5	Comp Output
6	V _{CC}

Rev: J
Date: 16-Sep-2021
Page 3 of 3