





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			510	MHz
Upper Frequency:	790			MHz
Tuning Voltage:	1.0		8.0	VDC
Supply Voltage:	7.75	8.0	8.25	VDC
Output Power:	+2.0	+5.5	+9.0	dBm
Supply Current:		20		mA
Harmonic Suppression (2 nd Harmonic)			-10	dBc
Pushing:			5.0	MHz/V
Pulling, all Phases:			3.0	MHz pk-pk
Tuning Sensitivity:		58		MHz/V
Phase Noise @ 10kHz offset:		-101		dBc/Hz
Phase Noise @ 100kHz offset:		-121		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			150	pF
Operating Temperature Range:	-40		+85	$^{\circ}$ C
Storage Temperature Range:	-45		+90	$^{\circ}$ C


FRONT

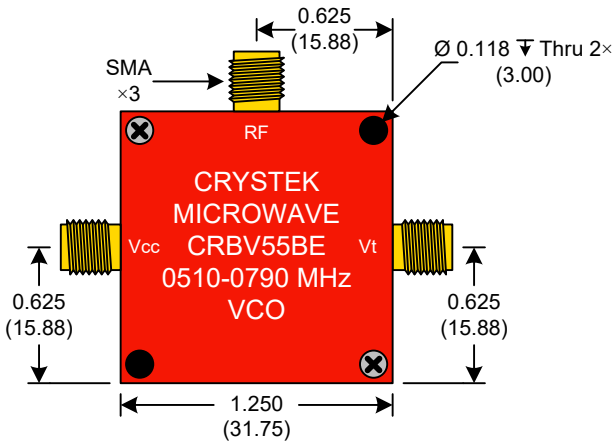

BACK

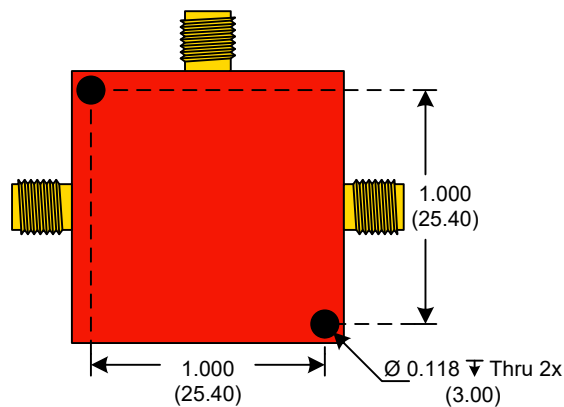

SIDE

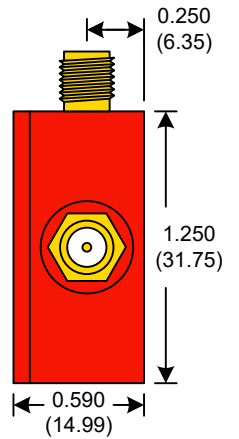


● Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$

Product Control:


Crystek Part Number:	CRBV55BE-0510-0790	Release Date:	03-Mar-2014
Revision Level:	C	Responsible:	C. Vales



Phase Noise (1 Hz BW, Typical)

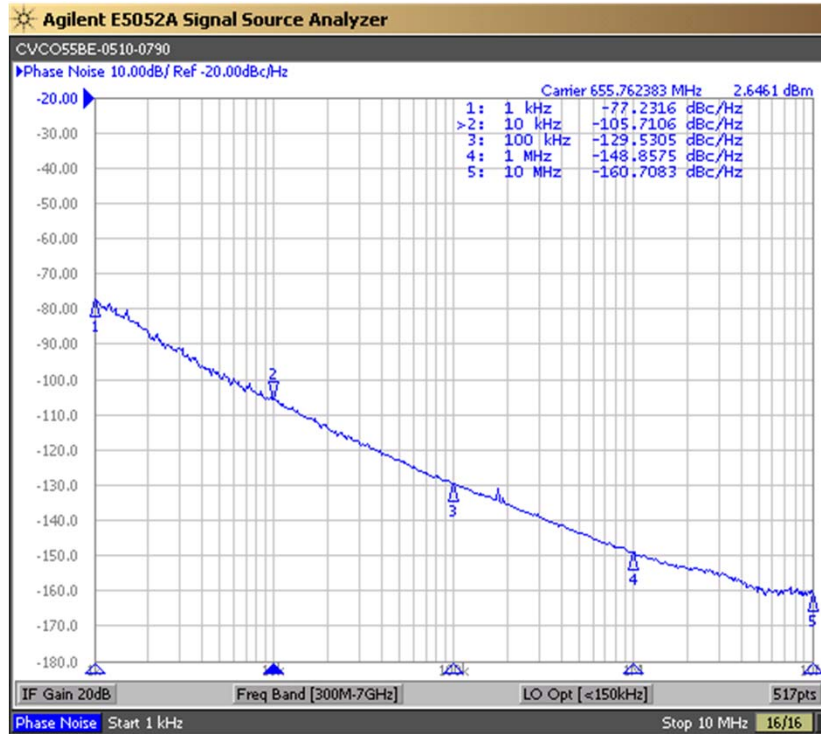

Tuning Curve (Typical)

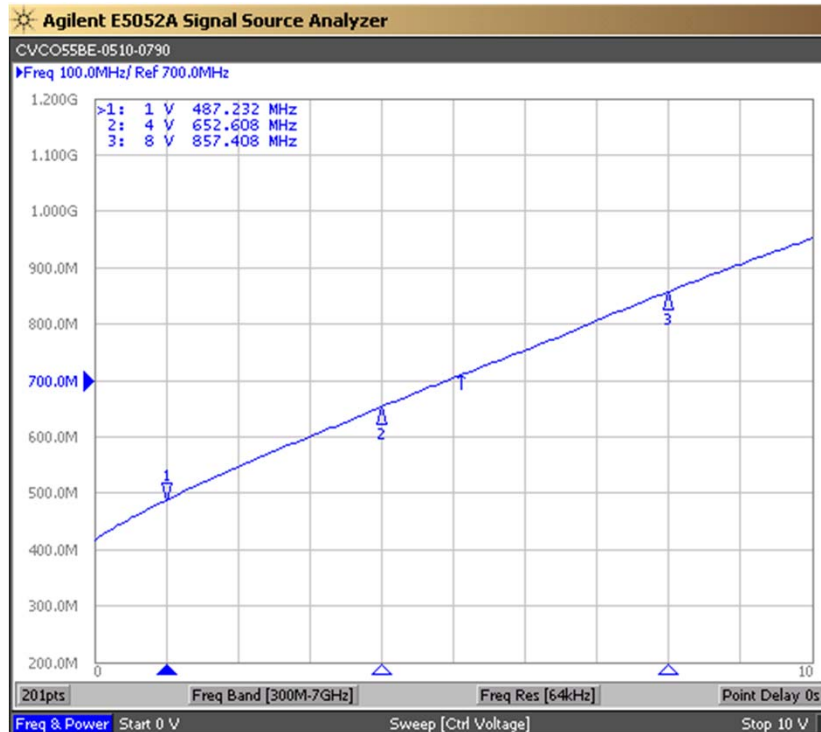

Product Control:

Crystek Part Number:	CRBV55BE-0510-0790	Release Date:	03-Mar-2014
Revision Level:	C	Responsible:	C. Vales

Specification is subject to change without notice