





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			430	MHz
Upper Frequency:	460			MHz
Tuning Voltage:	0.3		3.3	VDC
Supply Voltage:	3.135	3.3	3.465	VDC
Output Power:	+1.0	+3.0	+5.0	dBm
Supply Current:		16	25	mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic):		-15	-12	dBc
Pushing:		0.5	1.0	MHz/V
Pulling, all Phases:		0.5	1.0	MHz pk-pk
Tuning Sensitivity:		18		MHz/V
Phase Noise @ 10kHz offset:		-106	-103	dBc/Hz
Phase Noise @ 100kHz offset:		-128	-123	dBc/Hz
Load Impedance:		50		$\Omega$
Input Capacitance:			100	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

Phase Noise (1 Hz BW, Typical)

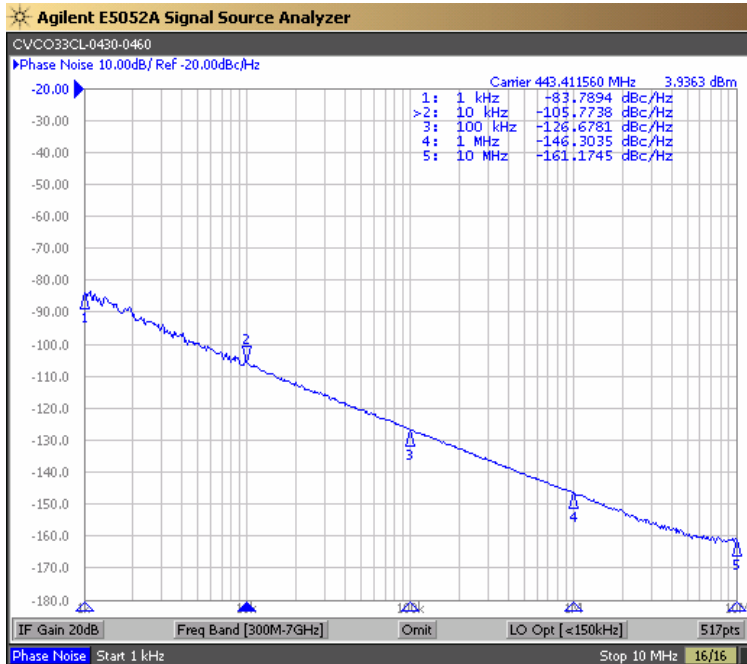


Tuning Curve (Typical)

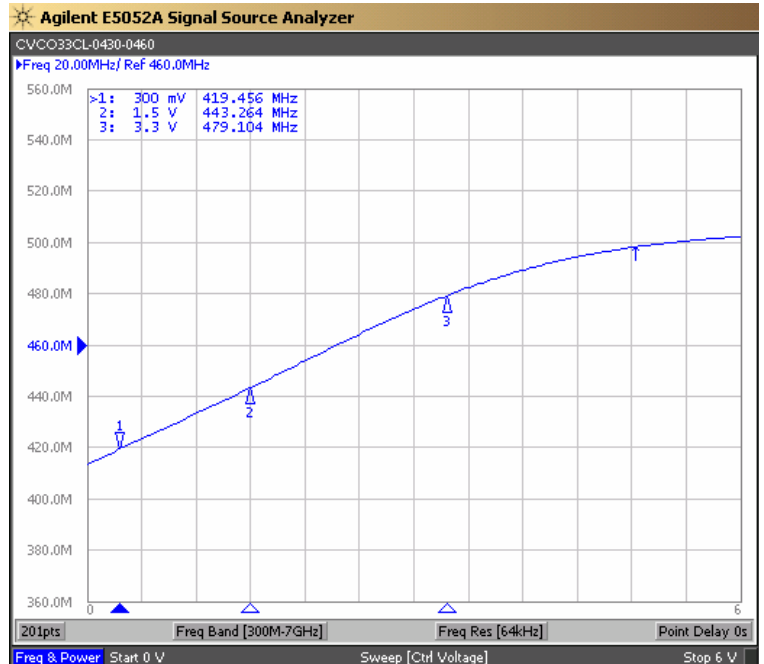

**Product Control:**


Crystek Part Number:	CVCO33CL-0430-0460	Release Date:	06-May-2014
Revision Level:	F	Responsible:	C. Vales

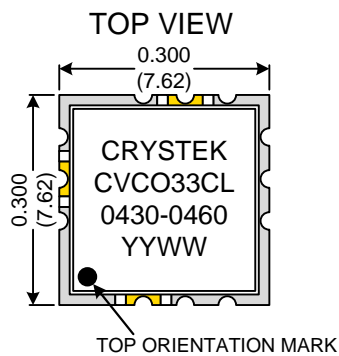

Pad	Connection
1	Vt
8	RF-OUTPUT
11	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in:  $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

**TAPE AND REEL**

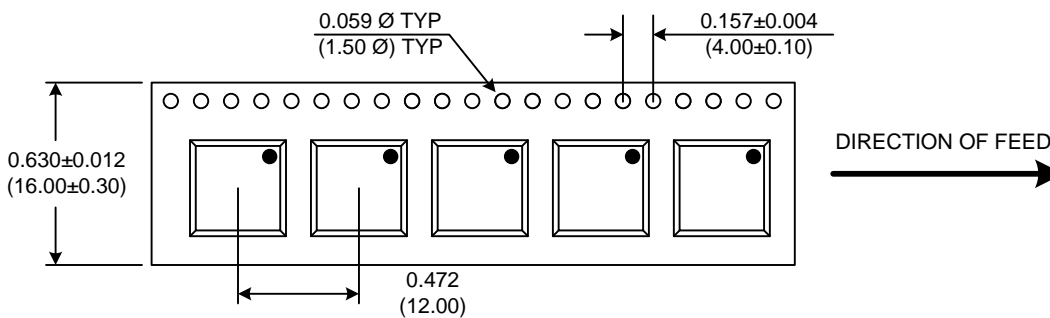

Drawing not to scale

<b>Product Control:</b>			
Crystek Part Number:	CVCO33CL-0430-0460	Release Date:	06-May-2014
Revision Level:	F	Responsible:	C. Vales

Specification is subject to change without notice

