



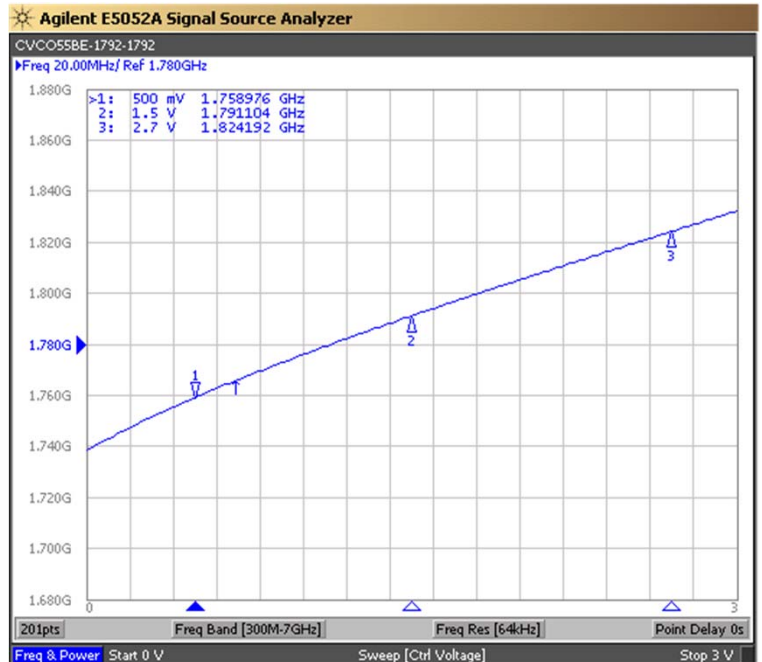

PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1792	MHz
Upper Frequency:	1792			MHz
Tuning Voltage:	0.5		2.7	VDC
Supply Voltage:	3.135	3.30	3.465	VDC
Output Power:	0	+2.5	+5.0	dBm
Supply Current:			12	mA
Harmonic Suppression (2 nd Harmonic):		-13	-8	dBc
Pushing:		1.5	3.0	MHz/V
Pulling, all Phases:		2.5	5.0	MHz pk-pk
Tuning Sensitivity:		25		MHz/V
Phase Noise @ 10kHz offset:		-103	-100	dBc/Hz
Phase Noise @ 100kHz offset:		-125	-122	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			47	pF
Operating Temperature Range:	-40		+85	$^{\circ}$ C
Storage Temperature Range:	-45		+90	$^{\circ}$ C

Phase Noise (1 Hz BW, Typical)





Tuning Curve (Typical)

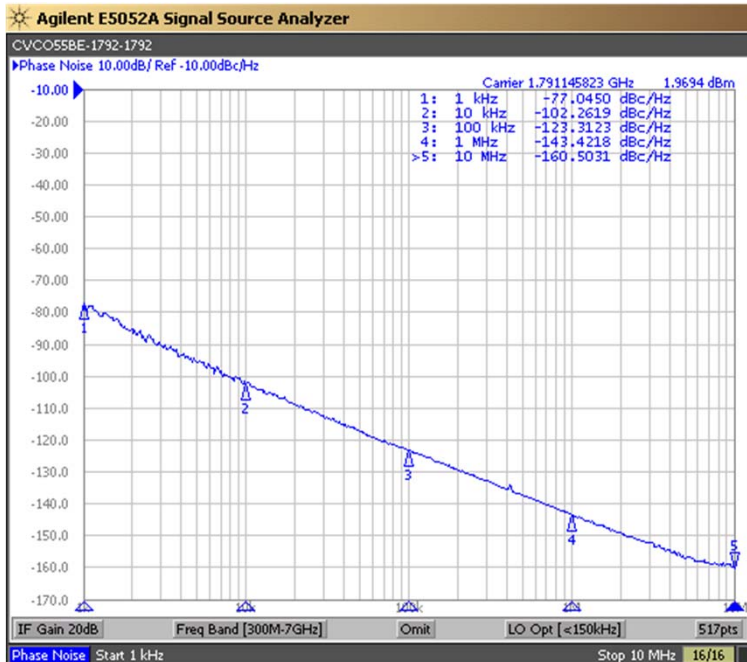

Product Control:

Crystek Part Number:	CVCO55BE-1792-1792	Release Date:	01-Oct-2018
Revision Level:	C	Responsible:	C. Vales



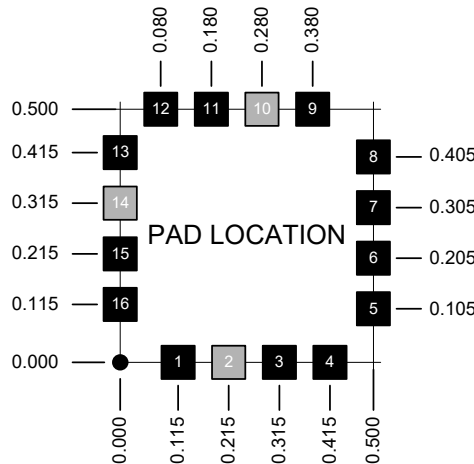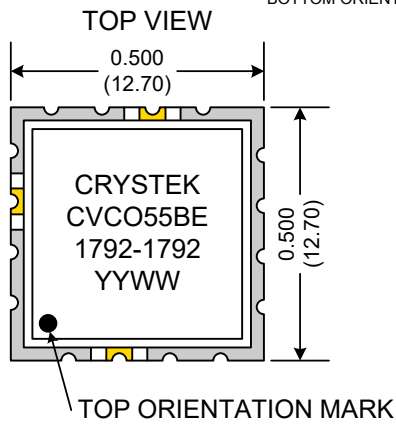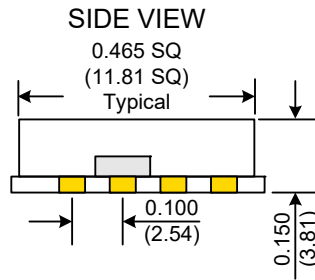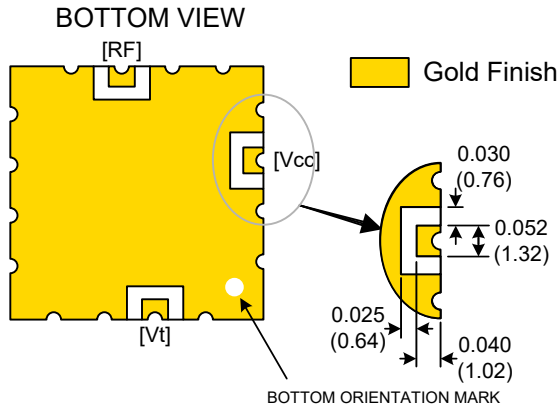

Pad	Connection
2	Vt
10	RF-OUTPUT
14	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

TAPE AND REEL



Drawing not to scale

Product Control:

Crystek Part Number:	CVCO55BE-1792-1792	Release Date:	01-Oct-2018
Revision Level:	C	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2