





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			896	MHz
Upper Frequency:	915			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	-7.0	-4.5	-2.0	dBm
Supply Current:			40	mA
Harmonic Suppression (2 nd Harmonic)		-15	-10	dBc
Pushing:		0.1	0.5	MHz/V
Pulling, all Phases:		0.5	1.0	MHz pk-pk
Tuning Sensitivity:		8		MHz/V
Phase Noise @ 12.5kHz offset:			-119	dBc/Hz
Phase Noise @ 25kHz offset:			-125	dBc/Hz
Phase Noise @ 1MHz offset: (Critical)			-152	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			47	pF
Operating Temperature Range:	-30		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-40		+90	$^{\circ}\text{C}$

Phase Noise (1 Hz BW, Typical)

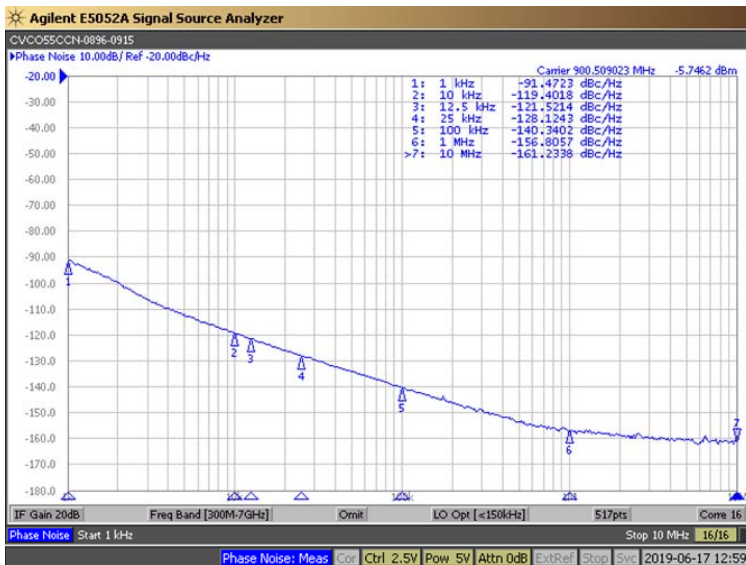




Tuning Curve (Typical)

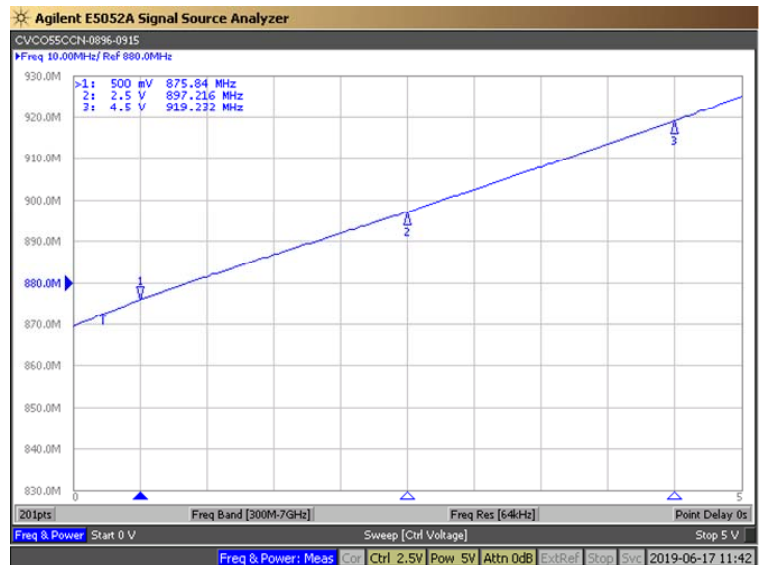

Product Control:

Crystek Part Number:	CVCO55CCN-0896-0915	Release Date:	18-Jun-2019
Revision Level:	B	Responsible:	C. Vales



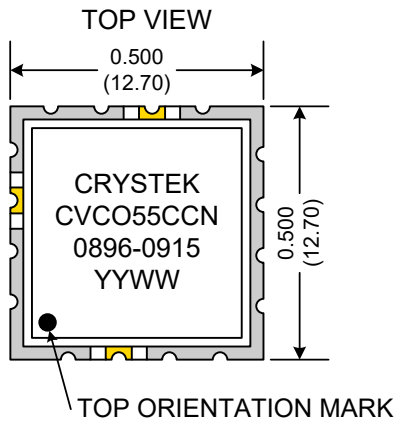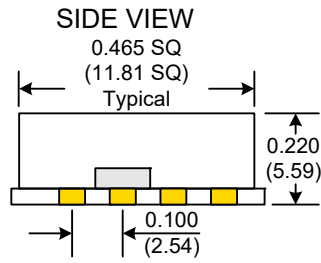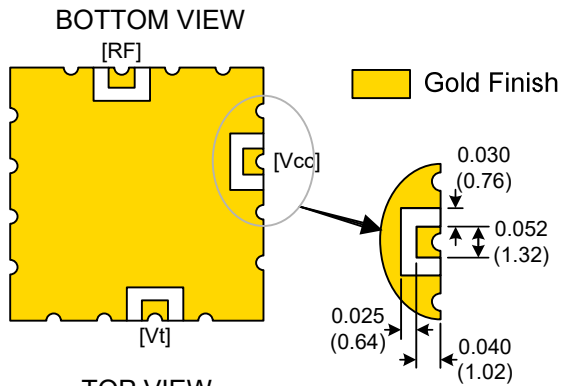

Pad	Connection
2	Vt
10	RF-OUTPUT
14	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

TAPE AND REEL



Drawing not to scale

Product Control:

Crystek Part Number:	CVCO55CCN-0896-0915	Release Date:	18-Jun-2019
Revision Level:	B	Responsible:	C. Vales

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.