



| PERFORMANCE SPECIFICATION | MIN | TYP | MAX | UNITS |
|--|------|------|------|--------------|
| Lower Frequency: | | | 1487 | MHz |
| Upper Frequency: | 1587 | | | MHz |
| Tuning Voltage: | 0.3 | | 4.7 | VDC |
| Supply Voltage: | 4.75 | 5.0 | 5.25 | VDC |
| Output Power: | 0 | +3.5 | +7.0 | dBm |
| Supply Current: | | | 33 | mA |
| Harmonic Suppression (2 nd Harmonic): | | -22 | | dBc |
| Pushing: | | | 3.0 | MHz/V |
| Pulling, all Phases: | | | 4.0 | MHz pk-pk |
| Tuning Sensitivity: | | 40 | | MHz/V |
| Phase Noise @ 10kHz offset: | | -100 | | dBc/Hz |
| Phase Noise @ 100kHz offset: | | -120 | | dBc/Hz |
| Load Impedance: | | 50 | | Ω |
| Input Capacitance: | | | 47 | pF |
| Operating Temperature Range: | -40 | | +85 | $^{\circ}$ C |
| Storage Temperature Range: | -45 | | +90 | $^{\circ}$ C |

Phase Noise (1 Hz BW, Typical)

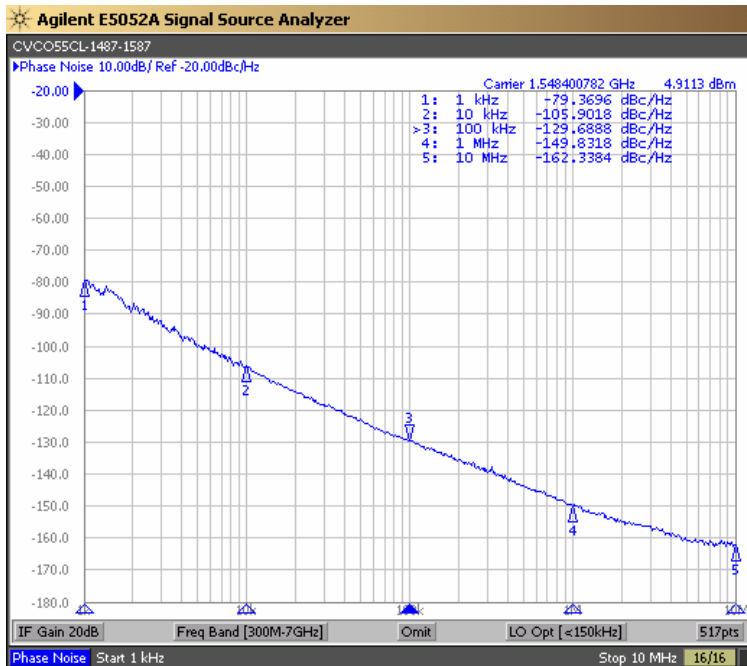




Tuning Curve (Typical)

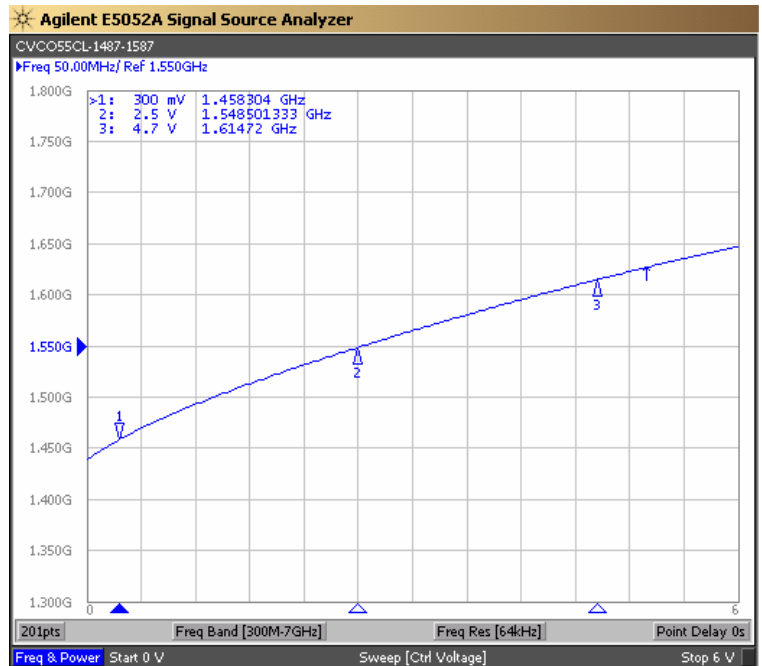


Product Control:

| | | | |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55CL-1487-1587 | Release Date: | 08-Dec-2020 |
| Revision Level: | F | Responsible: | C. Vales |



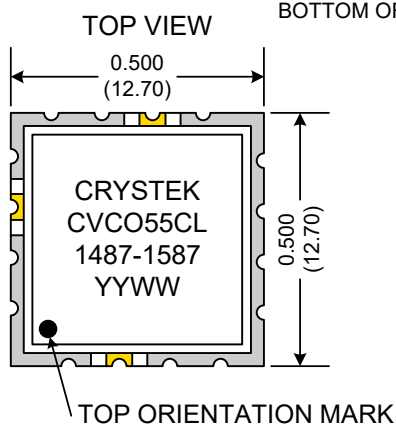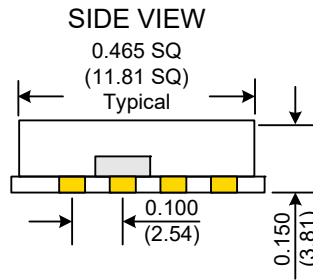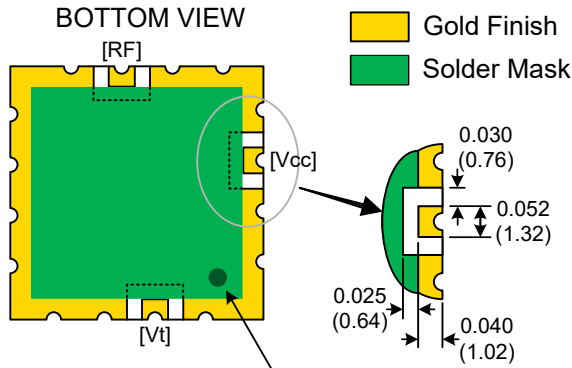


BOTTOM ORIENTATION MARK

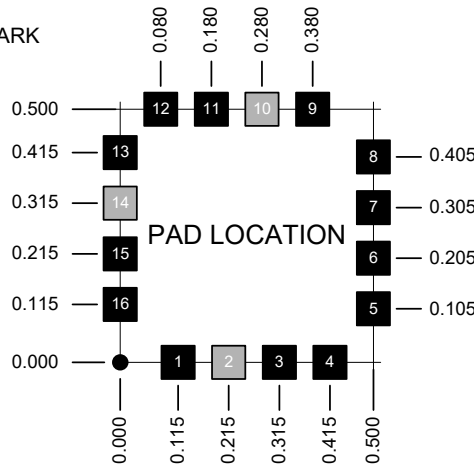

| Pad | Connection |
|--------|------------|
| 2 | Vt |
| 10 | RF-OUTPUT |
| 14 | Vcc |
| Others | GROUND |

- Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

TAPE AND REEL

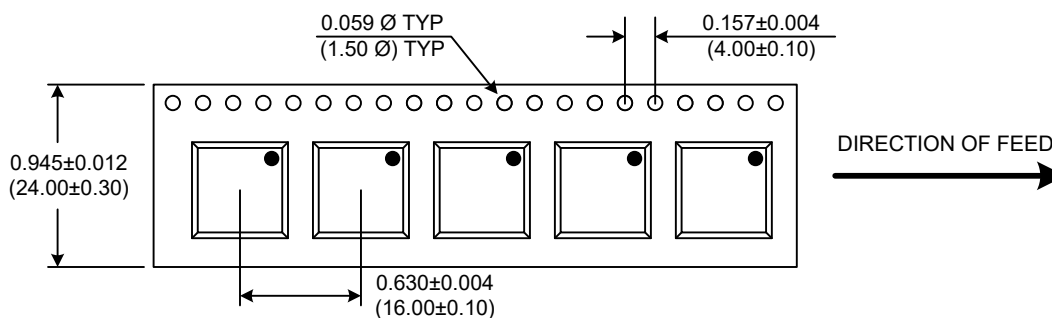

Drawing not to scale

Product Control:

| | | | |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55CL-1487-1587 | Release Date: | 08-Dec-2020 |
| Revision Level: | F | Responsible: | C. Vales |

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.