








PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			169	MHz
Upper Frequency:	218			MHz
Tuning Voltage:	0.1		2.9	VDC
Supply Voltage:	2.85	3.0	3.15	VDC
Output Power:	-2.0	0	+2.0	dBm
Supply Current:			5	mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic):		-20		dBc
Pushing:		0.5	1.0	MHz/V
Pulling, all Phases:		1.0	1.5	MHz pk-pk
Tuning Sensitivity:		35		MHz/V
Phase Noise @ 10kHz offset:		-110		dBc/Hz
TX Modulation Sensitivity:	-15	-20	-25	kHz/V
TX Modulation Port Input Capacitance:		100		pF
Residual FM (100Hz - 10kHz)			5	Hz RMS
Load Impedance:		50		$\Omega$
Input Capacitance:			470	pF
Operating Temperature Range:	-30		+70	$^{\circ}$ C
Storage Temperature Range:	-45		+90	$^{\circ}$ C

Phase Noise (1 Hz BW, Typical)

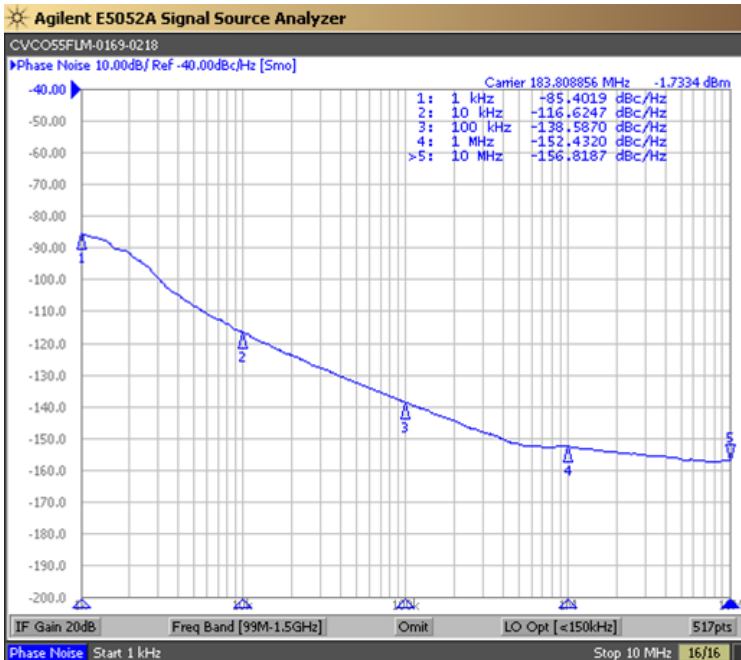


Tuning Curve (Typical)

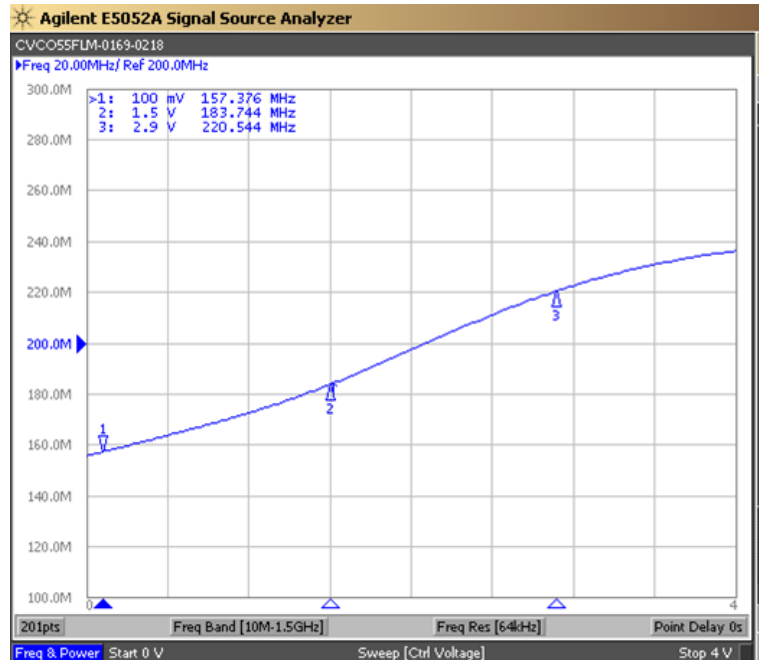

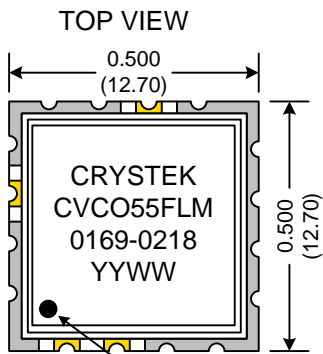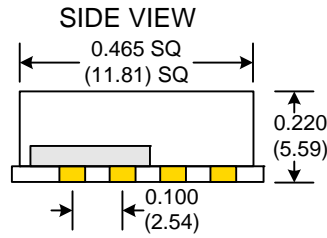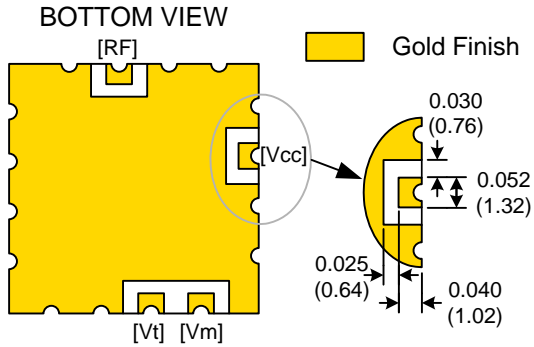

TOP ORIENTATION MARK

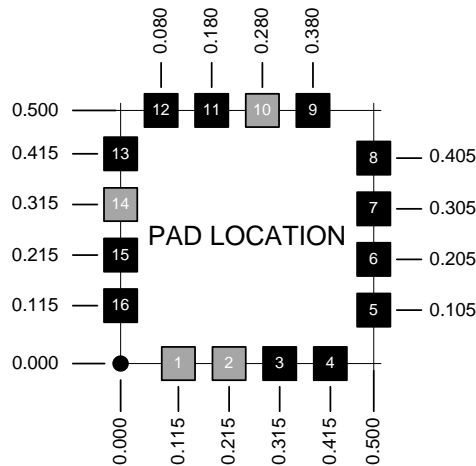

Pad	Connection
1	Vm
2	Vt
10	RF-OUTPUT
14	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in:  $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

**TAPE AND REEL**



Drawing not to scale

**Product Control:**

Crystek Part Number:	CVCO55FLM-0169-0218	Release Date:	16-Dec-2013
Revision Level:	E	Responsible:	C. Vales

Specification is subject to change without notice