

High Pass Filter


50Ω BNC

10 MHz 7th Order

Part Number: CHPFL-0010-BNC



Schematic

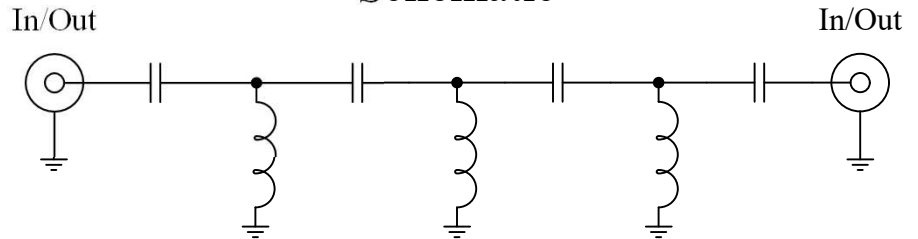

Features:


- 7th Order Chebyshev Response
- 50Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -45°C to 90°C
- 50 VDC

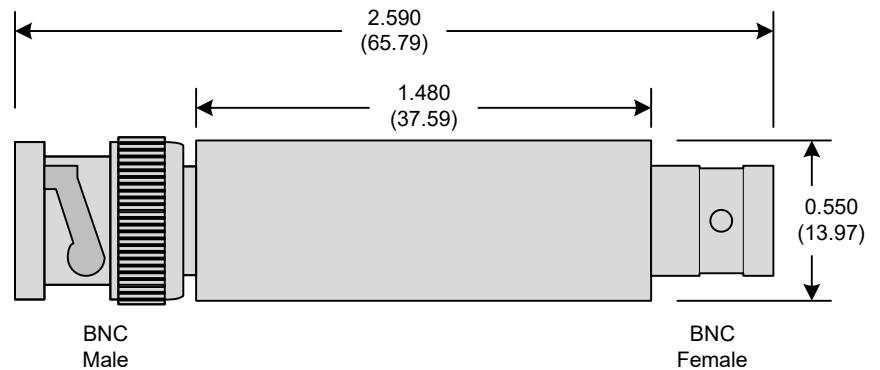

Crystek's new line of BNC High Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection.



Designed for Test Equipment and General Lab Use.

Product Control:


Crystek Part Number:	CHPFL-0010-BNC	Release Date:	09-Apr-2026
Revision Level:	C	Responsible:	K. Piotrowicz



High Pass Filter
50Ω BNC
10 MHz 7th Order

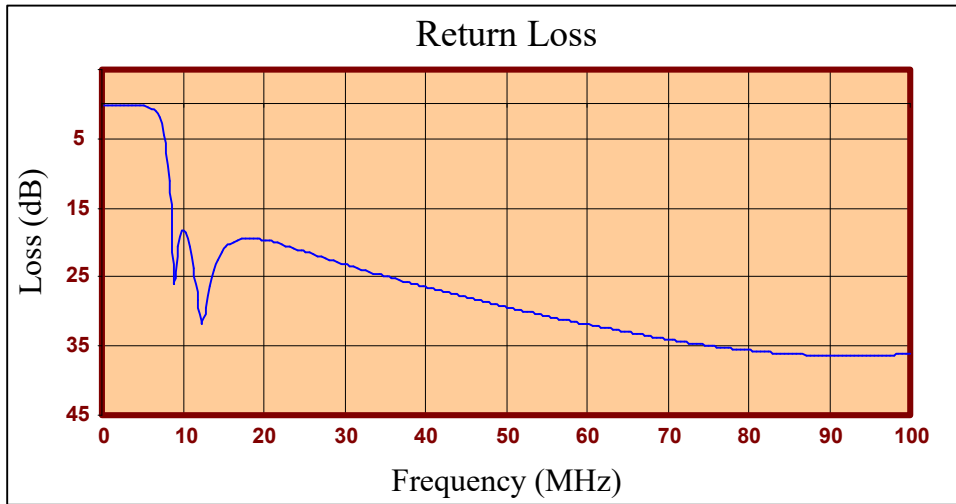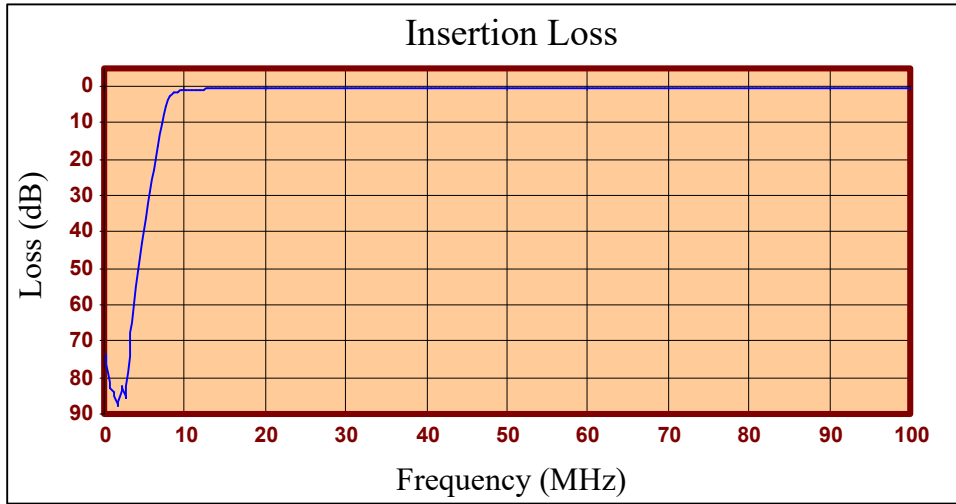

Product Control:			
Crystek Part Number:	CHPFL-0010-BNC	Release Date:	09-Apr-2026
Revision Level:	C	Responsible:	K. Piotrowicz



High Pass Filter
 50Ω BNC
 10 MHz 7th Order

FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	73.61	0.04
0.799	82.66	0.04
1.297	83.85	0.03
1.796	87.70	0.03
2.294	82.19	0.04
2.793	84.86	0.05
3.291	70.23	0.07
3.790	59.76	0.10
4.288	50.83	0.15
4.787	42.99	0.21
5.285	35.84	0.29
5.784	29.12	0.41
6.282	22.67	0.62
6.781	16.42	1.02
7.279	10.47	1.97
7.778	5.50	4.61
8.276	2.61	11.19
8.775	1.61	25.82
9.273	1.31	20.53
9.772	1.17	18.14
10.270	1.05	18.65
10.769	0.95	20.61
11.267	0.87	23.77
12.264	0.75	31.88
12.763	0.71	29.46
13.261	0.67	26.19
14.258	0.63	22.47
14.757	0.61	21.43
19.243	0.50	19.51
26.222	0.40	21.75
35.195	0.33	24.96
40.180	0.31	26.55
45.165	0.29	28.02
56.132	0.27	30.94
65.105	0.26	33.04
75.075	0.25	34.95
91.027	0.24	36.36
100.000	0.24	36.14

Product Control:

Crystek Part Number:	CHPFL-0010-BNC	Release Date:	09-Apr-2026
Revision Level:	C	Responsible:	K. Piotrowicz

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.

