



High Pass Filter
50Ω BNC
25 MHz 7th Order

Part Number: CHPFL-0025-BNC

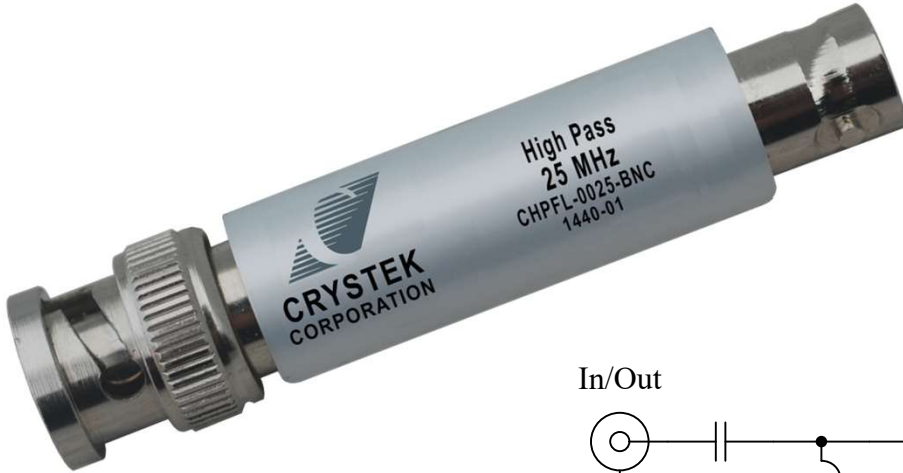

Schematic

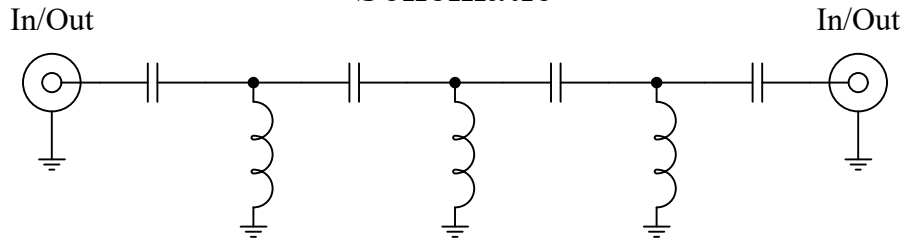

Features:


- 7th Order Chebyshev Response
- 50Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -55°C to 100°C
- 50 VDC

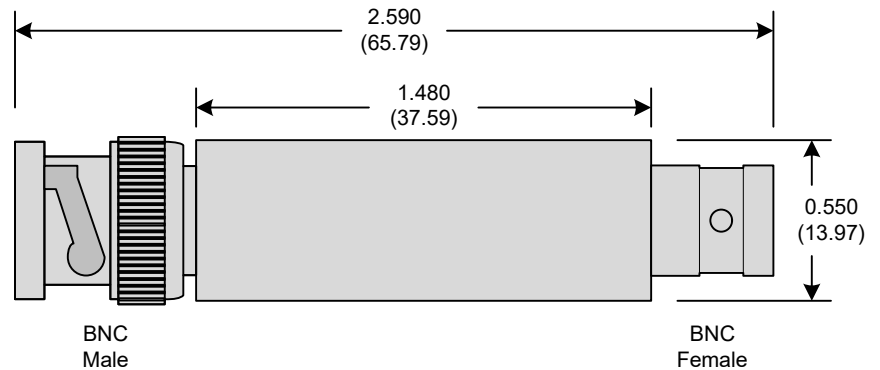



Crystek's new line of BNC High Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection. Designed for Test Equipment and General Lab Use.

Product Control:


Crystek Part Number:	CHPFL-0025-BNC	Release Date:	16-Apr-2026
Revision Level:	G	Responsible:	K. Piotrowicz



High Pass Filter
 50Ω BNC
 25 MHz 7th Order

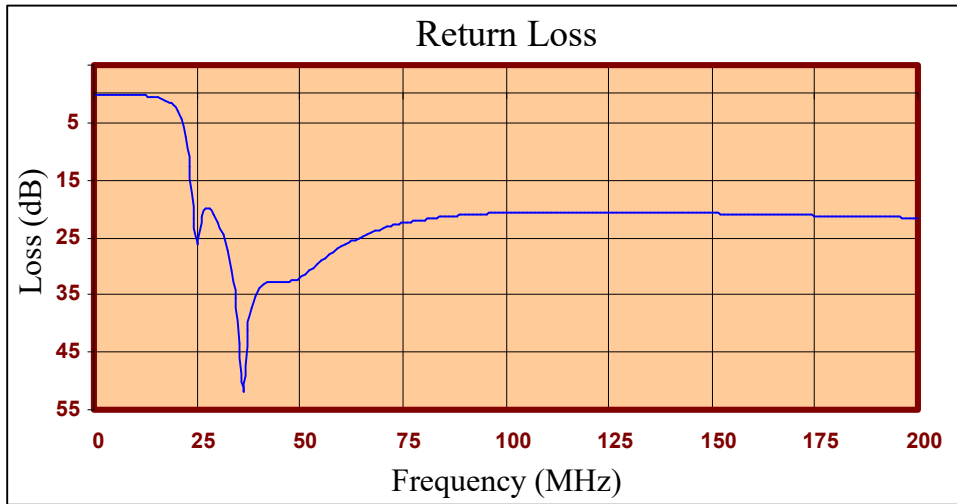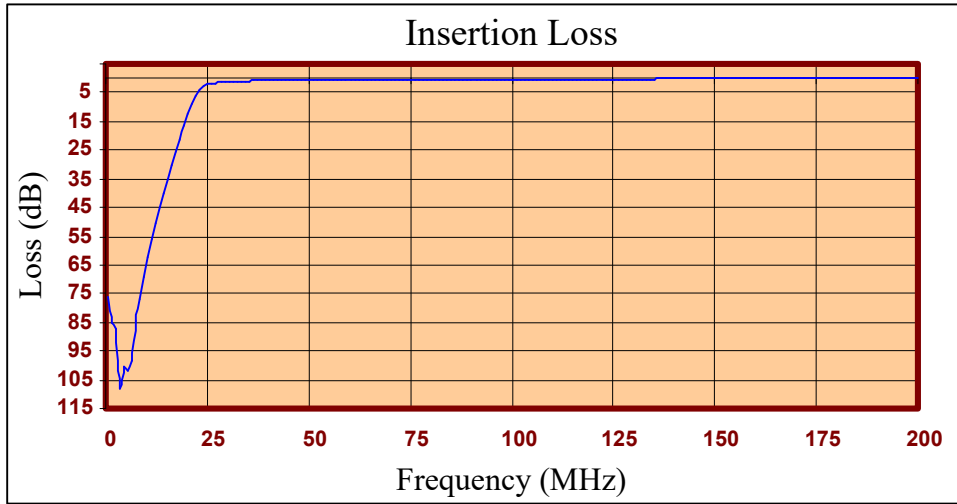

Product Control:			
Crystek Part Number:	CHPFL-0025-BNC	Release Date:	16-Apr-2026
Revision Level:	G	Responsible:	K. Piotrowicz



High Pass Filter
 50Ω BNC
 25 MHz 7th Order

FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	76.13	0.05
1.299	85.00	0.03
2.297	87.58	0.03
3.296	107.74	0.04
4.294	100.41	0.05
5.293	101.75	0.07
6.291	98.07	0.09
7.290	84.16	0.11
8.288	76.51	0.15
9.287	69.04	0.19
10.285	62.53	0.24
11.284	56.24	0.29
12.282	50.47	0.37
13.281	45.05	0.45
14.279	39.91	0.56
15.278	34.97	0.69
16.276	30.19	0.87
17.275	25.55	1.10
18.273	21.03	1.44
19.272	16.63	1.97
20.270	12.45	2.88
21.269	8.71	4.53
22.267	5.76	7.55
24.264	2.81	21.58
25.263	2.27	26.38
26.261	1.96	21.52
28.258	1.57	20.07
33.251	1.43	20.99
40.240	0.76	37.21
54.219	0.45	30.87
66.201	0.31	23.46
80.180	0.27	21.88
90.165	0.25	21.08
112.132	0.22	20.51
130.105	0.20	20.57
150.075	0.19	20.82
182.027	0.18	21.30
200.000	0.18	21.61

Product Control:				Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.
Crystek Part Number:	CHPFL-0025-BNC	Release Date:	16-Apr-2026	
Revision Level:	G	Responsible:	K. Piotrowicz	