





| PERFORMANCE SPECIFICATION                       | MIN  | TYP  | MAX  | UNITS              |
|---|------|------|------|--------------------|
| Lower Frequency:                                |      |      | 2950 | MHz                |
| Upper Frequency:                                | 4200 |      |      | MHz                |
| Tuning Voltage:                                 | 1.5  |      | 18.5 | VDC                |
| Supply Voltage:                                 | 4.75 | 5.0  | 5.25 | VDC                |
| Output Power:                                   | -2.0 | +1.5 | +5.0 | dBm                |
| Supply Current:                                 |      | 16   | 25   | mA                 |
| Harmonic Suppression (2 <sup>nd</sup> Harmonic) |      | -15  | -10  | dBc                |
| Pushing:  |      | 5.0  | 8.0  | MHz/V              |
| Pulling, all Phases:                            |      | 5.0  | 8.0  | MHz pk-pk          |
| Tuning Sensitivity:                             |      | 100  |      | MHz/V              |
| Phase Noise @ 10kHz offset:                     |      | -85  | -80  | dBc/Hz             |
| Phase Noise @ 100kHz offset:                    |      | -109 | -100 | dBc/Hz             |
| Load Impedance:                                 |      | 50   |      | $\Omega$           |
| Input Capacitance:                              |      |      | 15   | pF                 |
| Operating Temperature Range:                    | -40  |      | +85  | $^{\circ}\text{C}$ |
| Storage Temperature Range:                      | -45  |      | +90  | $^{\circ}\text{C}$ |


FRONT

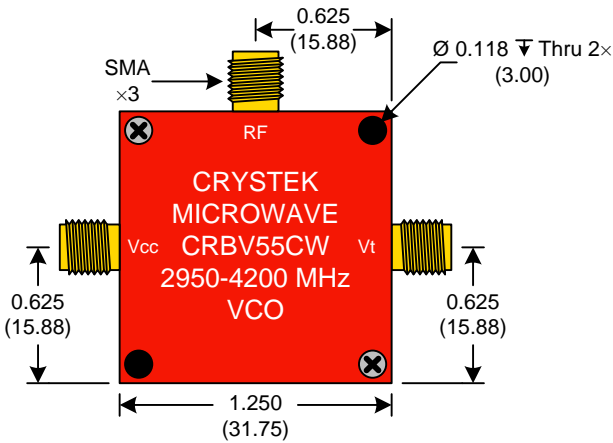

BACK

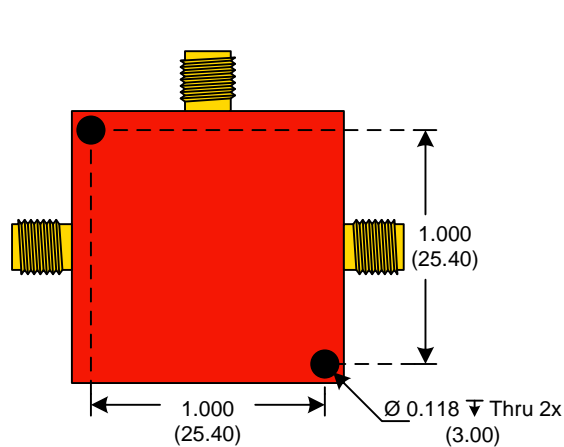

SIDE

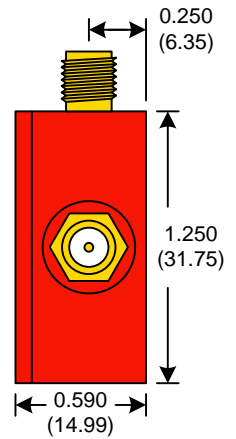

● Unless otherwise specified, Dimensions are in:  $\frac{\text{IN}}{(\text{mm})}$


**Product Control:**

|                      |                    |               |             |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CRBV55CW-2950-4200 | Release Date: | 10-Mar-2016 |
| Revision Level:      | B                  | Responsible:  | C. Vales    |






Phase Noise (1 Hz BW, Typical)

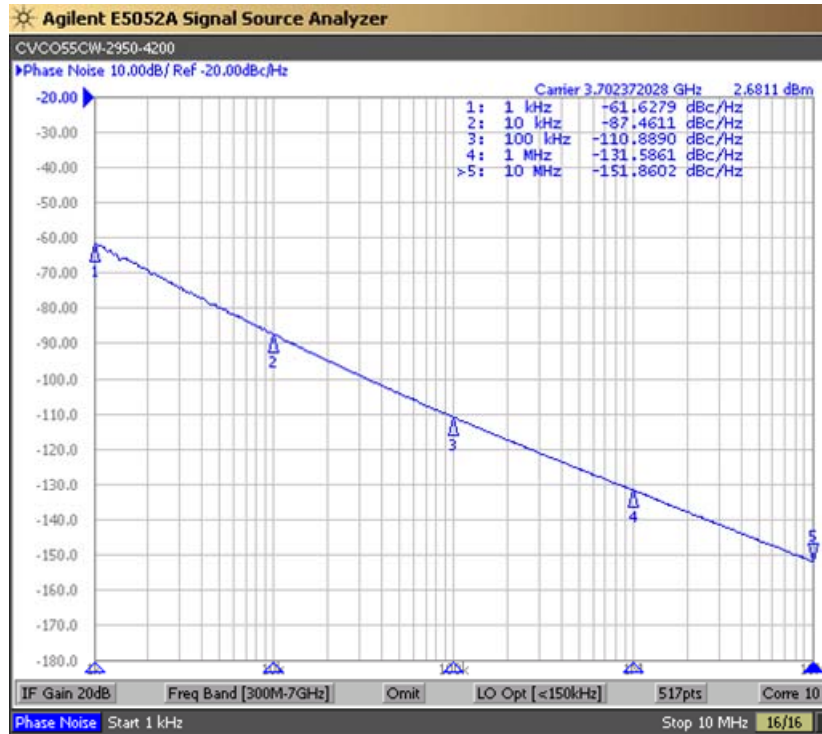

Tuning Curve (Typical)

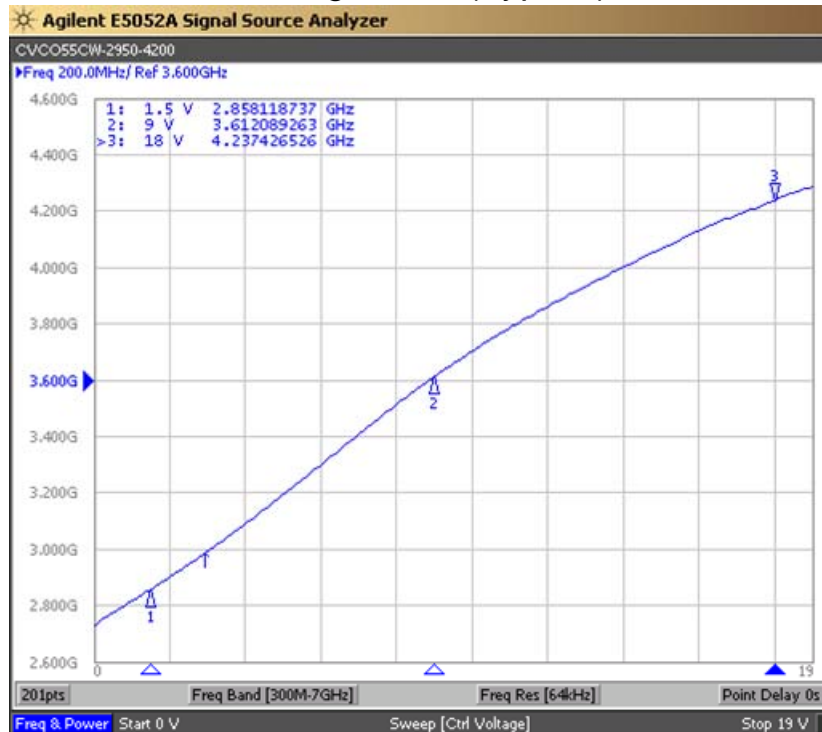

**Product Control:**

|                      |                    |               |             |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CRBV55CW-2950-4200 | Release Date: | 10-Mar-2016 |
| Revision Level:      | B                  | Responsible:  | C. Vales    |

Specification is subject to change without notice

