



**CRYSTEK**  
**MICROWAVE**  
 A DIVISION OF CRYSTEK CORPORATION

# 18 GHz HAND FORMABLE .141 COAX CABLES

## 50 Ohm DC-18 GHz Hand Formable Coaxial Cables



### Features:

- Center Conductor:** Silver-plated copper clad steel wire
- Outer Braid:** Tin-soaked copper braid, 100% coverage
- Insulation:** PTFE (Polytetrafluoroethylene) dielectric
- Cable Outer Diameter:** 0.141" (3.58mm)
- Connectors:** Gold-plated brass
- Center Pin:** Gold-plated brass
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.39" (10mm) single bend  
1.57" (40mm) multiple bends

### Electrical Specifications:

- Impedance:** 50 Ohms
  - Frequency:** DC to 18 GHz
  - Insertion Loss:** <.67 dB/ft at 18 GHz
  - VSWR:** <1.35 to 18 GHz
  - Nominal Capacitance:** 28.6 pF/ft
  - Velocity of Propagation:** 70%
  - Shield Effectiveness:** 130 dB Typical
  - Attenuation (dB/ft):** 0.12 Typical at 1 GHz  
0.23 Typical at 3 GHz  
0.31 Typical at 5 GHz  
0.46 Typical at 10 GHz  
0.65 Typical at 18 GHz
- \*connector loss not included (refer to actual cable plot below)*


- Avg Power in (Watts):** 686 @ 400 MHz  
419 @ 1 GHz  
122 @ 10 GHz  
83 @ 18 GHz
- \*as specified at 40°C*

- Applications:** Jumpers  
Instrumentation  
High Frequency Interconnects

*Custom Lengths Available*

*Electrically Matched Pairs Available*

Actual Plot

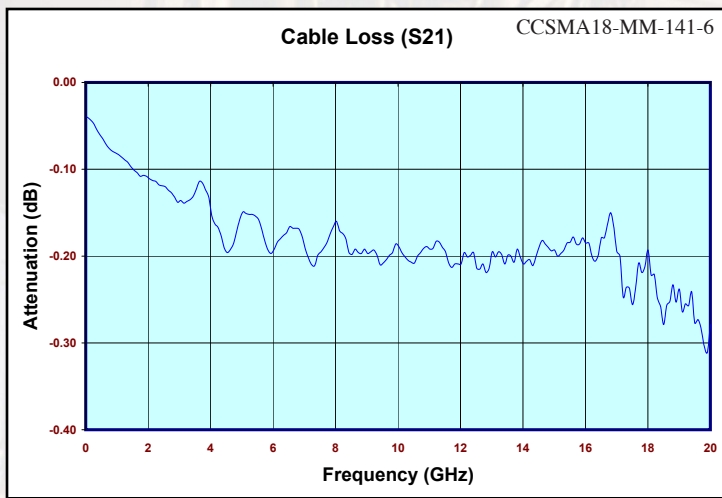

### SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA18-MM-141-3	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	3"
CCSMA18-MM-141-4	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	4"
CCSMA18-MM-141-5	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	5"
CCSMA18-MM-141-6	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	6"
CCSMA18-MM-141-7	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	7"
CCSMA18-MM-141-8	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	8"
CCSMA18-MM-141-10	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	10"
CCSMA18-MM-141-12	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	12"



12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
 PHONE: 239-561-3311 • 800-237-3061 Rev.: C  
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 08-04-22