



PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			5600	MHz
Upper Frequency:	5800			MHz
Tuning Voltage:	0		6.0	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	-3.0	0	+3.0	dBm
Supply Current:		20	30	mA
Harmonic Suppression (2 nd Harmonic):		-22		dBc
Pushing:			4.0	MHz/V
Pulling, all Phases:		30.0	50.0	MHz pk-pk
Tuning Sensitivity:		125		MHz/V
Phase Noise @ 10kHz offset:		-85		dBc/Hz
Phase Noise @ 100kHz offset:		-107		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			15	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$





Phase Noise (1 Hz BW, Typical)

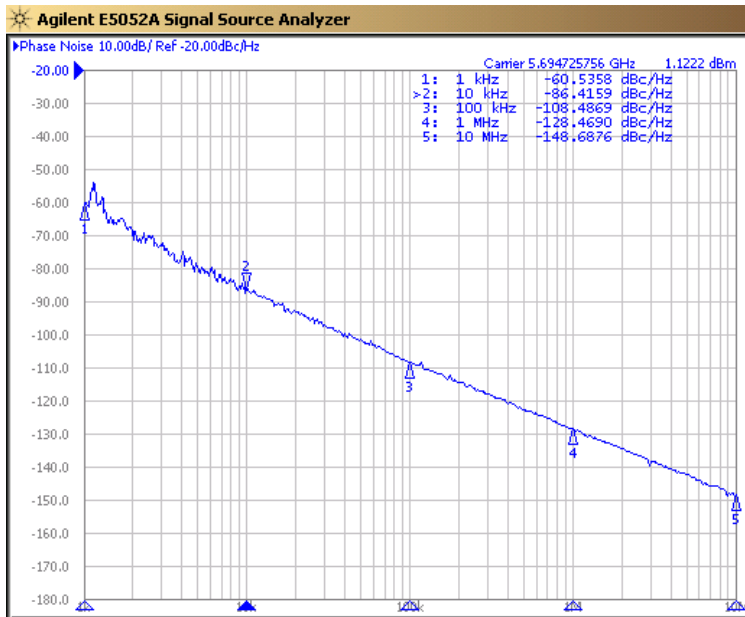

Tuning Curve (Typical)

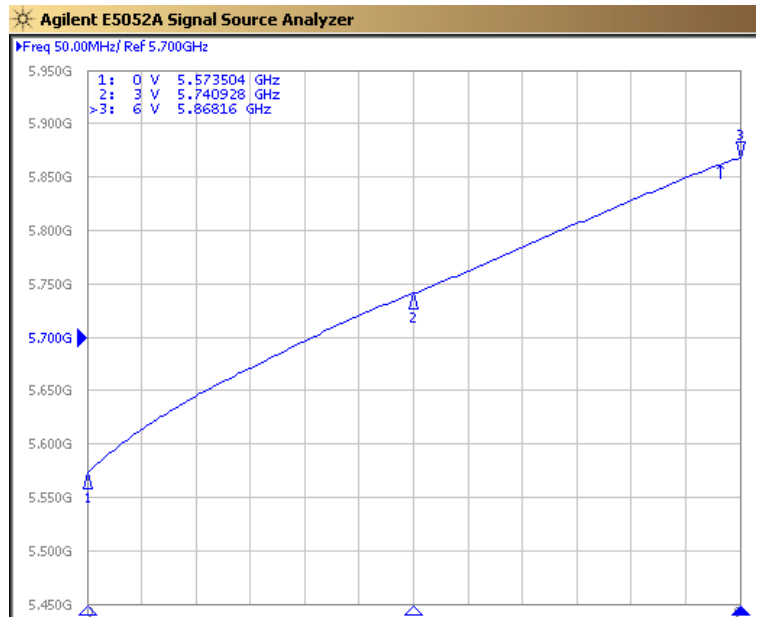


Product Control:			
Crystek Part Number:	CVCO55BHS-5600-5800	Release Date:	06-Jul-2016
Revision Level:	F	Responsible:	C. Vales

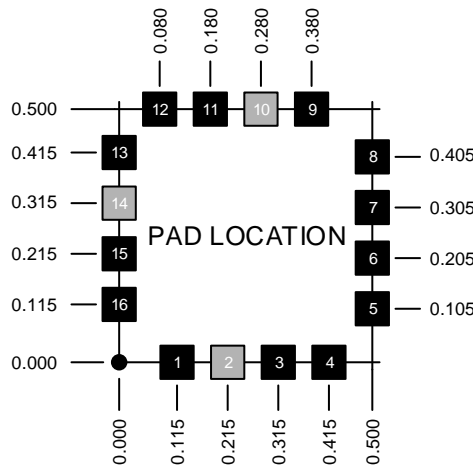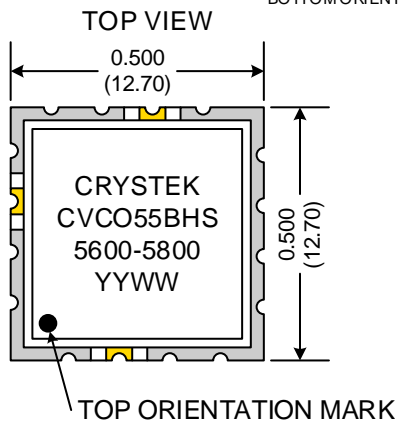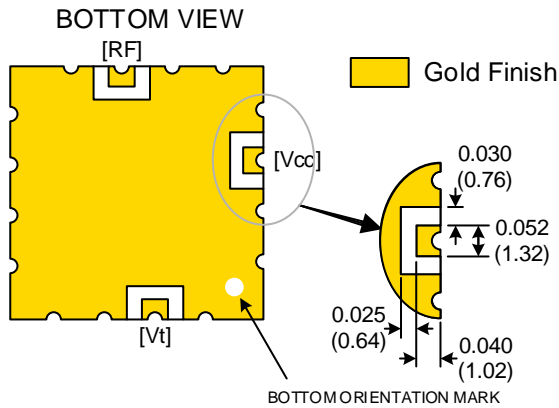

Pad	Connection
2	Vt
10	RF-OUTPUT
14	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in: IN (mm)
- Pad Location Dimensions are in: Inches

TAPE AND REEL

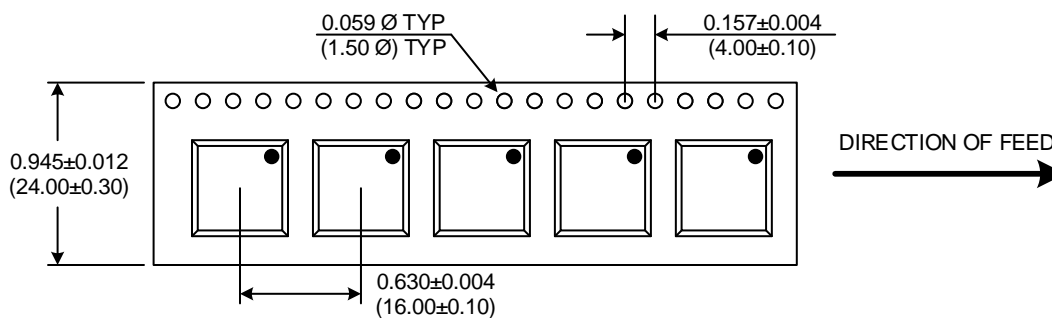

Drawing not to scale

Product Control:

Crystek Part Number:	CVCO55BHS-5600-5800	Release Date:	06-Jul-2016
Revision Level:	F	Responsible:	C. Vales

Specification is subject to change without notice