




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			3136	MHz
Upper Frequency:	3214			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+6.0	+9.0	+12.0	dBm
Supply Current:		25		mA
Harmonic Suppression (2 nd Harmonic)		-10		dBc
Pushing:		5.0		MHz/V
Pulling, all Phases:		10.0		MHz pk-pk
Tuning Sensitivity:		70		MHz/V
Phase Noise @ 10kHz offset:		-96		dBc/Hz
Phase Noise @ 100kHz offset:		-116		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			33	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

FRONT

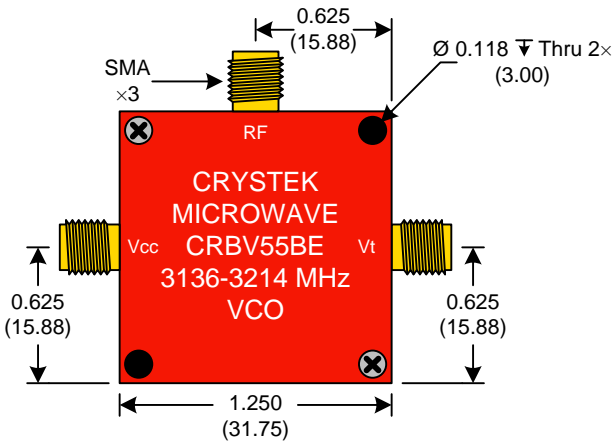

BACK



SIDE




● Unless otherwise specified, Dimensions are in: $\frac{\text{IN}}{(\text{mm})}$

Product Control:


Crystek Part Number:	CRBV55BE-3136-3214	Release Date:	15-Dec-2014
Revision Level:	B	Responsible:	C. Vales



Phase Noise (1 Hz BW, Typical)

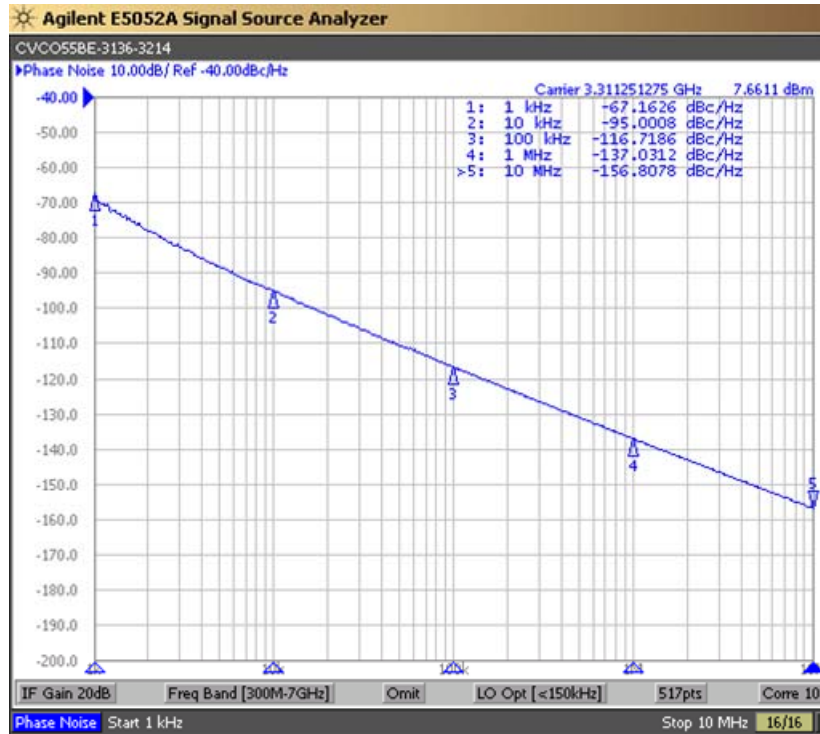

Tuning Curve (Typical)

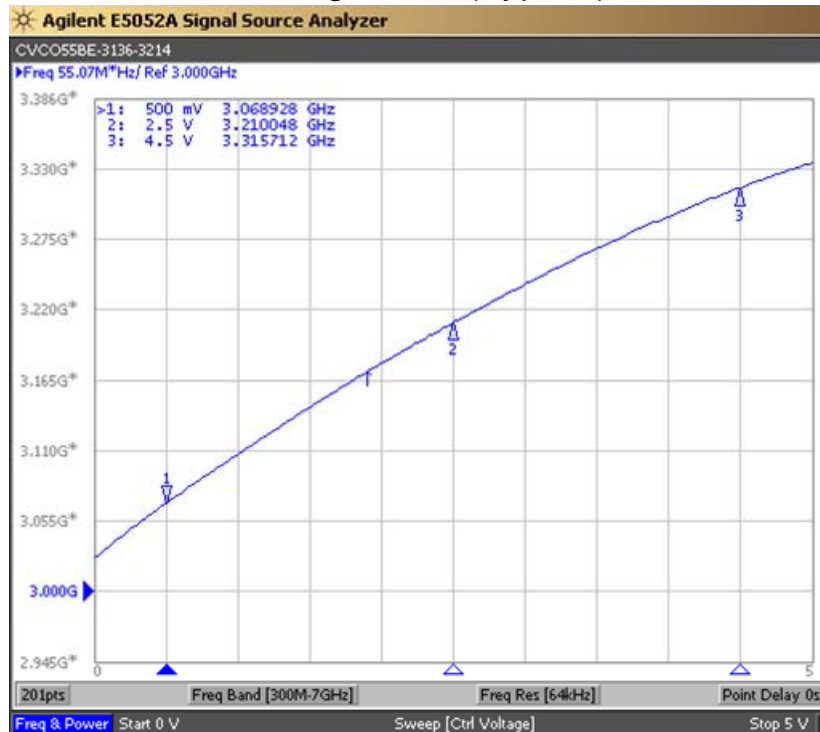

Product Control:

Crystek Part Number:	CRBV55BE-3136-3214	Release Date:	15-Dec-2014
Revision Level:	B	Responsible:	C. Vales

Specification is subject to change without notice