





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1100	MHz
Upper Frequency:	1400			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+5.0	+7.5	+10.0	dBm
Supply Current:		20		mA
Harmonic Suppression (2 nd Harmonic)		-10		dBc
Pushing:			3.0	MHz/V
Pulling, all Phases:			13.0	MHz pk-pk
Tuning Sensitivity:		130		MHz/V
Phase Noise @ 10kHz offset:		-97		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			75	pF
Operating Temperature Range:	-40		+85	$^{\circ}$ C
Storage Temperature Range:	-45		+90	$^{\circ}$ C


FRONT

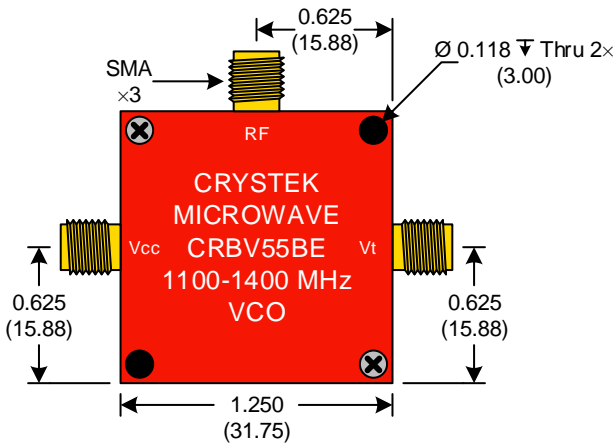

BACK

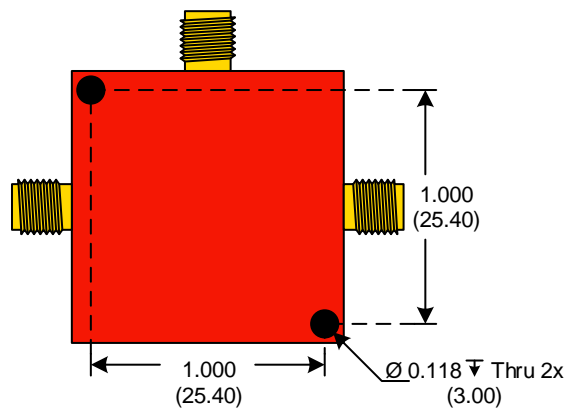

SIDE

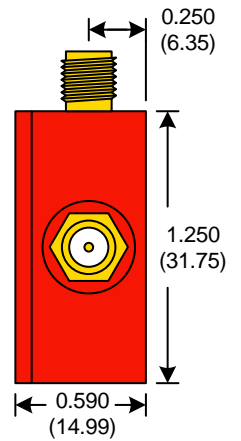


● Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$


Product Control:

Crystek Part Number:	CRBV55BE-1100-1400	Release Date:	10-Jan-2014
Revision Level:	B	Responsible:	C. Vales






Phase Noise (1 Hz BW, Typical)

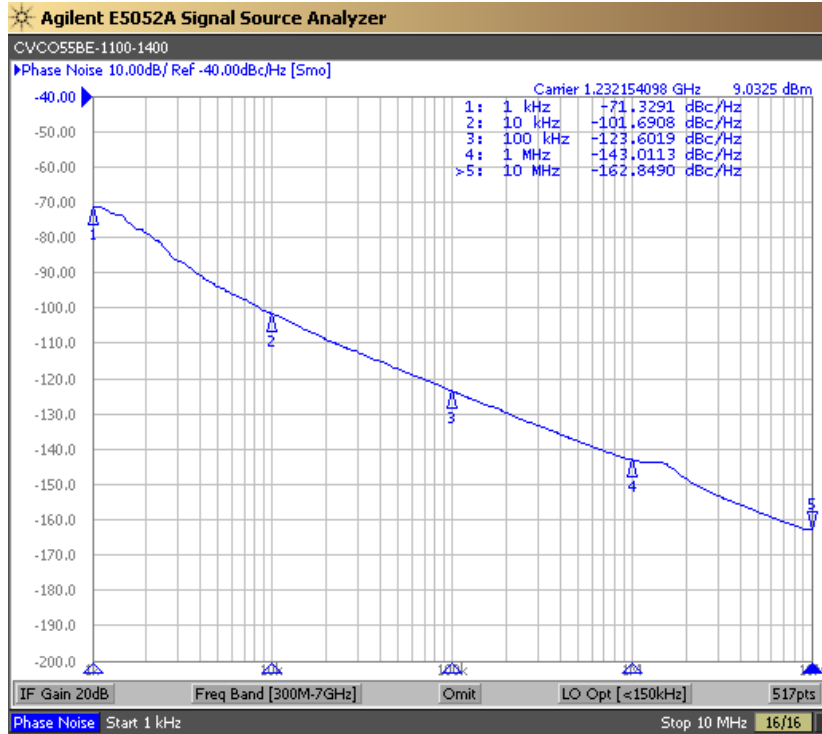

Tuning Curve (Typical)

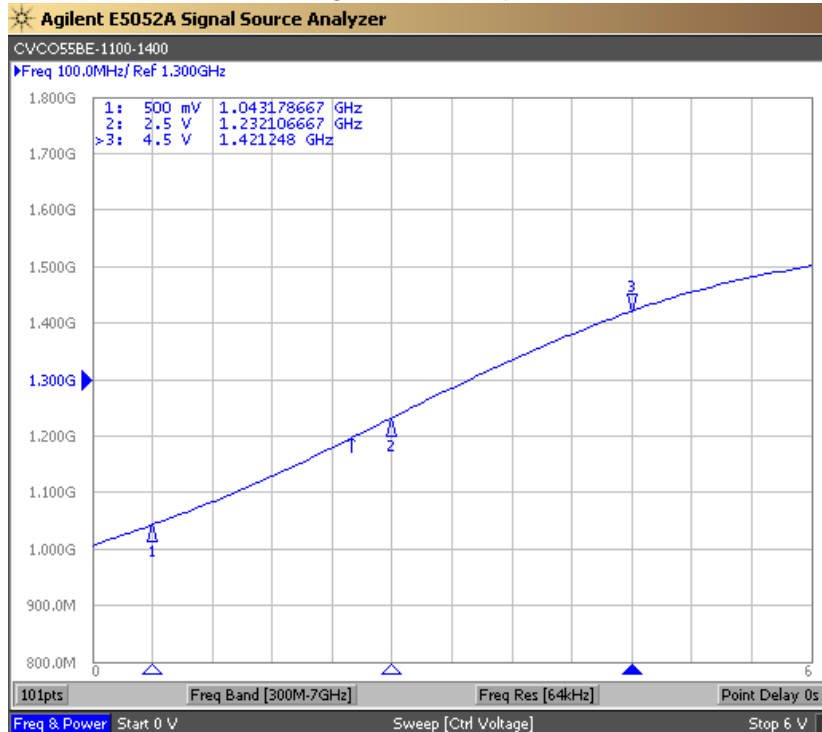

Product Control:

Crystek Part Number:	CRBV55BE-1100-1400	Release Date:	10-Jan-2014
Revision Level:	B	Responsible:	C. Vales

Specification is subject to change without notice

