




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1300	MHz
Upper Frequency:	2700			MHz
Tuning Voltage:	0.15		25.0	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+2.0	+5.0	+8.0	dBm
Supply Current:		25	35	mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic)		-10		dBc
Pushing:		5.0		MHz/V
Pulling, all Phases:		8.0		MHz pk-pk
Tuning Sensitivity:		70		MHz/V
Phase Noise @ 10kHz offset:		-84		dBc/Hz
Load Impedance:		50		$\Omega$
Input Capacitance:			47	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

FRONT

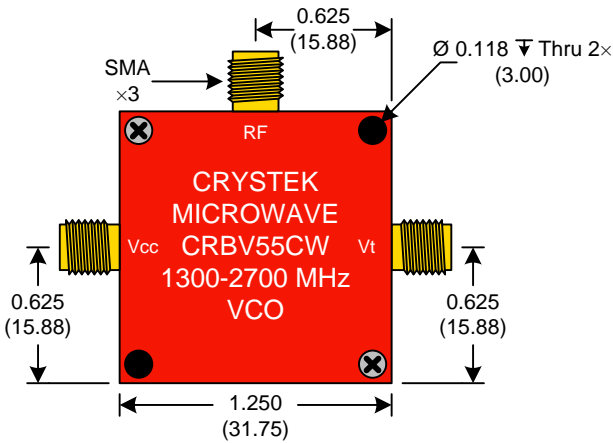

BACK



SIDE




● Unless otherwise specified, Dimensions are in:  $\frac{\text{IN}}{(\text{mm})}$


Product Control:			
Crystek Part Number:	CRBV55CW-1300-2700	Release Date:	30-Oct-2013
Revision Level:	C	Responsible:	C. Vales



Phase Noise (1 Hz BW, Typical)

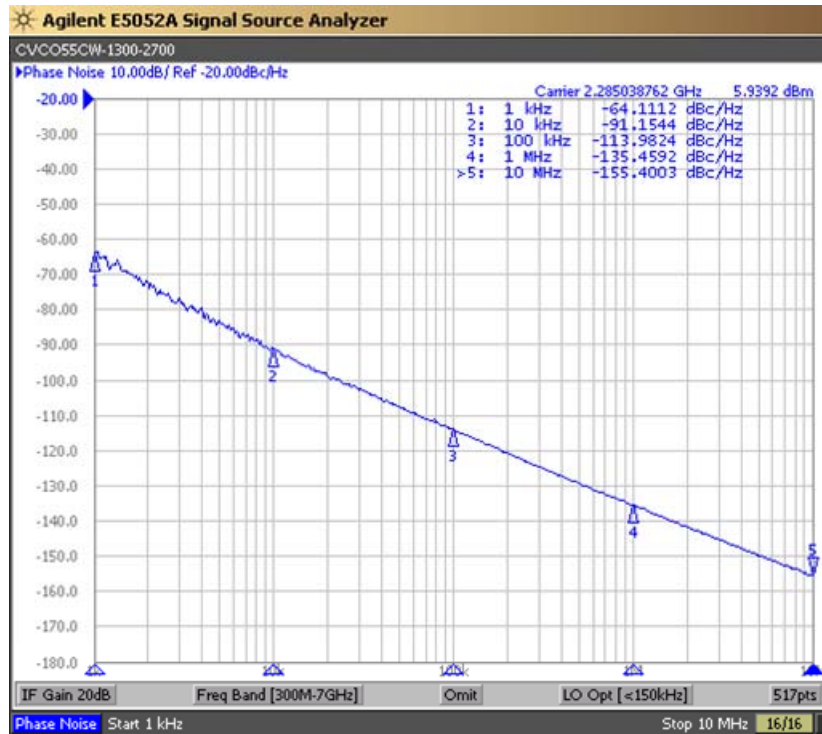

Tuning Curve (Typical)

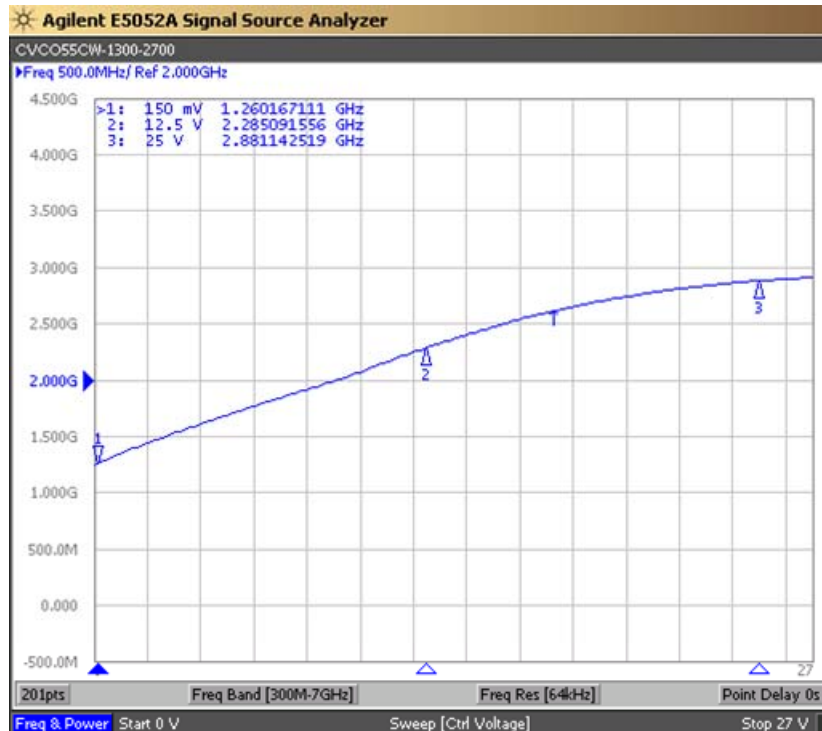

**Product Control:**

Crystek Part Number:	CRBV55CW-1300-2700	Release Date:	30-Oct-2013
Revision Level:	C	Responsible:	C. Vales

Specification is subject to change without notice

