



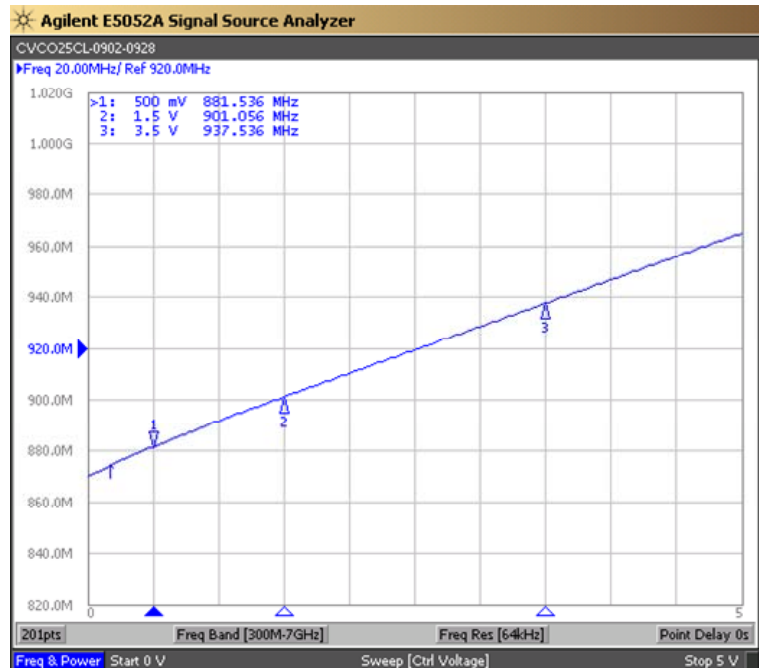

PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			902	MHz
Upper Frequency:	928			MHz
Tuning Voltage:	0.5		3.5	VDC
Supply Voltage:	2.85	3.0	3.15	VDC
Output Power:	+2.0	+5.0	+8.0	dBm
Supply Current:			15	mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic):		-10		dBc
Pushing:		0.5		MHz/V
Pulling, all Phases:		0.5		MHz pk-pk
Tuning Sensitivity:		30		MHz/V
Phase Noise @ 10kHz offset:		-108		dBc/Hz
Phase Noise @ 100kHz offset:		-128		dBc/Hz
Load Impedance:		50		$\Omega$
Input Capacitance:			40	pF
Operating Temperature Range:	-25		+85	$^{\circ}$ C
Storage Temperature Range:	-45		+90	$^{\circ}$ C

Phase Noise (1 Hz BW, Typical)


Tuning Curve (Typical)

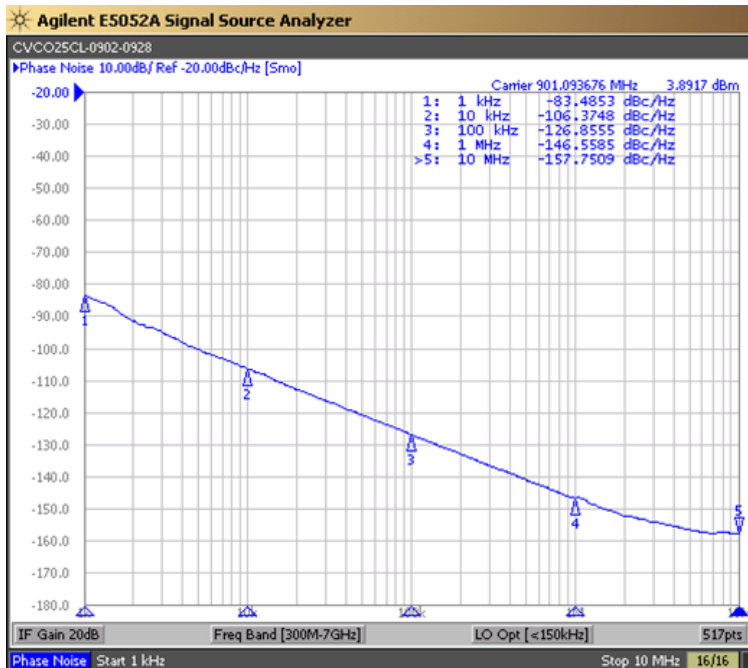


**Product Control:**

Crystek Part Number:	CVCO25CL-0902-0928	Release Date:	03-Apr-2017
Revision Level:	H	Responsible:	C. Vales



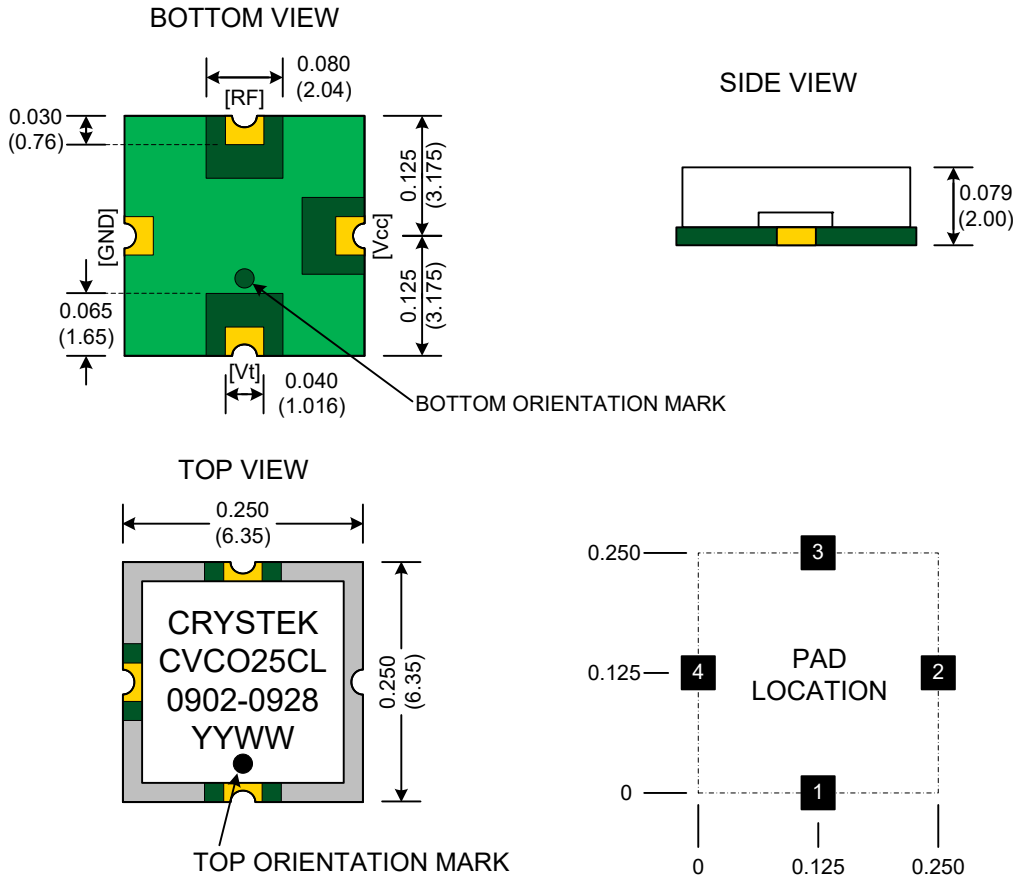

**TAPE AND REEL**

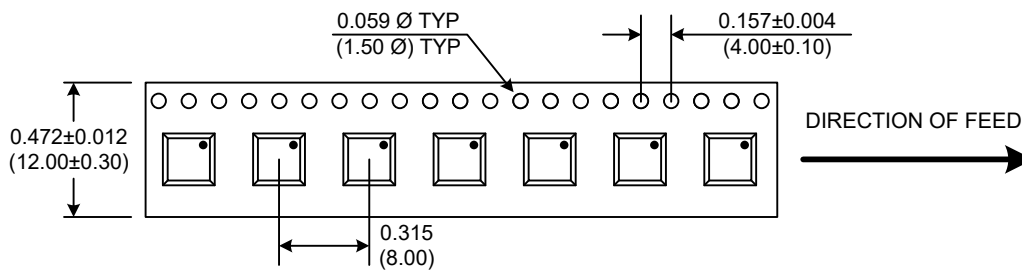

Drawing not to scale

**Product Control:**

Crystek Part Number:	CVCO25CL-0902-0928	Release Date:	03-Apr-2017
Revision Level:	H	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2