



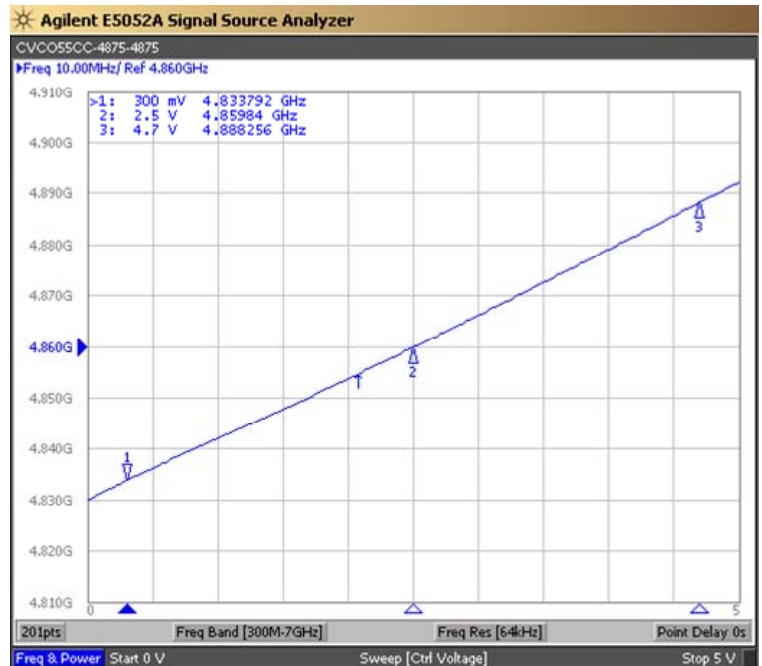

PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			4875	MHz
Upper Frequency:	4875			MHz
Tuning Voltage:	0.3		4.7	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+3.5	+5.5	+7.5	dBm
Supply Current:		30		mA
Harmonic Suppression: (2 <sup>nd</sup> Harmonic)		-15		dBc
Pushing:		1.0	2.0	MHz/V
Pulling, all Phases:		1.0	2.0	MHz pk-pk
Tuning Sensitivity:		12		MHz/V
Phase Noise @ 10kHz offset:		-102		dBc/Hz
Phase Noise @ 100kHz offset:		-125		dBc/Hz
Load Impedance:		50		$\Omega$
Input Capacitance:			12	pF
Operating Temperature Range:	-40		+85	$^{\circ}$ C
Storage Temperature Range:	-45		+90	$^{\circ}$ C

Phase Noise (1 Hz BW, Typical)




Tuning Curve (Typical)

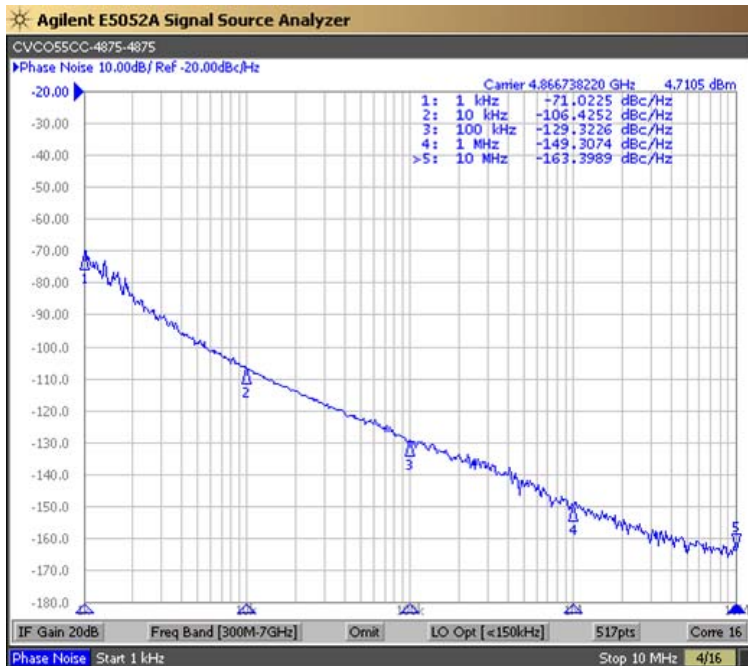

**Product Control:**

Crystek Part Number:	CVCO55CC-4875-4875	Release Date:	24-Feb-2022
Revision Level:	C	Responsible:	C. Vales



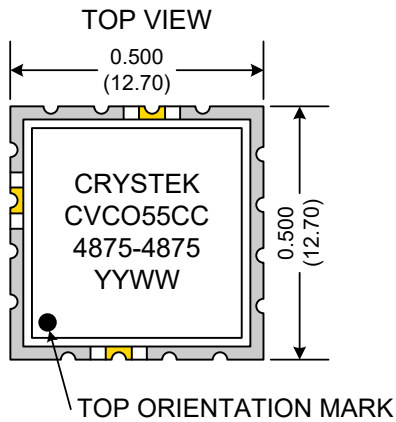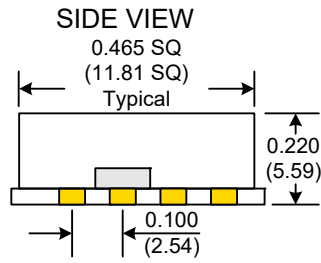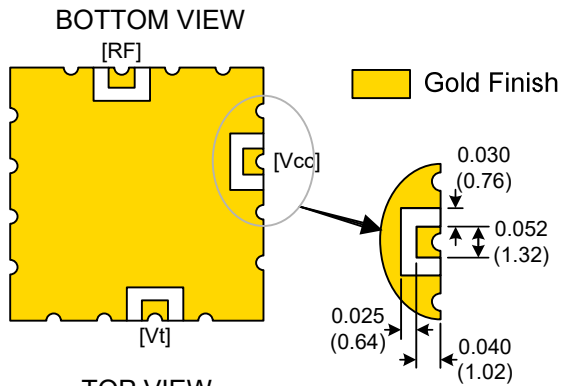

Pad	Connection
2	Vt
10	RF-OUTPUT
14	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in:  $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

**TAPE AND REEL**



Drawing not to scale

Drawing not to scale

**Product Control:**

Crystek Part Number:	CVCO55CC-4875-4875	Release Date:	24-Feb-2022
Revision Level:	C	Responsible:	C. Vales

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.

Page 2 of 2